

SOUTHEAST POLES

Lighting Poles and Brackets



America Light, Inc
1489 W 13th Street
Riviera Beach FL 33404

Phone 561.296.0364
Sales@AmericaLight.com

Table of Contents	Page
Terms and Conditions	i
Mission Statement	ii
Wind Maps US and Florida Wind Speed Maps	1-2
Poles/Posts and Bases	
PCST Series Square Tapered Concrete Poles.....	3-4
CBR-24 Series 24" Round Concrete Pole Bases.....	5-6
PSS Series 4"-5" Square Steel Anchor Base Poles	7-8
PSRT Series Round Tapered Steel Poles	9-10
PAS Series 4"-5"-6" Square Aluminum Poles	11-12
PAS-DB Series 4"-5"-6" Square Aluminum Direct Bury Poles	13-14
PAR Series 4"-5"-6" Round Aluminum Poles	15-16
PAR-DB Series 4"-5"-6" Round Aluminum Direct Bury Poles	17-18
PAT Series 5" Round Aluminum Tennis Poles	19-20
PART Series Round Tapered Aluminum Poles.....	21-22
PARF Series 4"-5" Round Aluminum Fluted Poles.....	23-24
DB-4 Series Decorative Bases for 4" Round Aluminum Poles.....	25
DA Series Decorative Arms.....	26
FP Series Flagler Series 4" Round Aluminum Decorative Pole	27
DP Series Delray Series 4" Round Aluminum Decorative Pole	28
HPP Series Hyde Park Series 4" Round Aluminum Decorative Pole	29
SAP Series St Augustine Series 4" Round Aluminum Decorative Pole	30
PAR3 Series 3" Round Aluminum Light Duty Posts - Direct Bury	31
PAR3-HD Series 3" Round Aluminum Heavy Duty Posts - Direct Bury	32
PAR3-AB Series 3" Round Aluminum Heavy Duty Posts - Anchor Base	33
DB-3 Series Decorative Bases for 3" Round Aluminum Poles.....	34
PFRT Series Round Tapered Fiberglass Poles.....	35-36
Brackets and Accessories	
PT Series Round Aluminum Pole Top Brackets for Multiple Fixture Mounting.....	37
Pole Arms, Slip Fitters and Pier Mounts	38
BHS Series Square Aluminum Bullhorns.....	39
BHR Series Round Steel Bullhorns.....	40
TR-TE-PA Series Aluminum Tenon Reducers-Expanders and Pole Adapters.....	41
TR-S & PA-S Series Steel Tenon Reducers and Pole Adapters.....	42
WM Series Wall Mount Brackets.....	43
U-Brackets and Yoke Mounts Steel and Aluminum U-Brackets and Yokes.....	44
Pole Caps and Pole Base Covers Steel and Aluminum Base Covers - Plastic Caps.....	45

Continued Next Page

Table of Contents (Continued)

Page

Brackets and Accessories (Continued)

PTS Series Round Steel Pole Top Brackets for Multiple Fixture Mounting.....	46
PMA Series Aluminum Pole Mounts.....	47
CPM Series Charging Aluminum Pole Mounts.....	48
PTS-S Series Square Steel Pole Top Brackets for Multiple Fixture Mounting.....	49
BHS-S Series Square Steel Bullhorns for Square Poles.....	50
PTT Series Aluminum Pole Top Brackets with 10 Degree Tilt for Multiple Fixture Mounting.....	51
PTA Series Aluminum Pole Top Brackets with Bent Angles for Multiple Fixture Mounting.....	52
EPT & AT Series Economy Pole Tops and Adjustable Tenons.....	53
BHSAT Series Square Aluminum Bullhorns with Adjustable Tenons.....	54
BHR-A Series Round Aluminum Bullhorns.....	55
CBHR Series Round Aluminum Charging Bullhorns.....	56
BHRR Series Round-Round Aluminum Bullhorns.....	57
CBHRR Series Round-Round Aluminum Charging Bullhorns.....	58
SL-A Series Aluminum Sports Lighter Brackets.....	59
SL-A-T Series Aluminum Sports Lighter Brackets with Tenon.....	60
CA-CAS Series Aluminum Cobra Arms.....	61
CMA Series Aluminum Cobra Mast Arms.....	62
CBHS Series Aluminum Charging Square Bullhorns.....	63

Other Products from America Light

Post Top Fixtures	64
Decorative Post Top, Shoebox and Flood Fixtures	65
Landscape and Bollard Fixtures	66
Outdoor Wall Light Fixtures	67
Outdoor Lighting Fixtures	68
Indoor Lighting Fixtures	69

TERMS AND CONDITONS OF SALE

POLE AND BRACKET WARRANTY

America Light warrants to the purchaser that the Southeast Pole products will be free from defects in material or workmanship for period(s) described below from date of manufacture when operated under normal conditions of use and when properly installed and applied. In no case shall the Warranty cover losses other than the repair or replacement of material at America Light's sole discretion. Acts of God and Nature are excluded such as lightning, flooding, and winds in excess of engineered certifications. Warranty for products are either replaced or repaired on a straight line pro-rated basis. Defective products must be returned to America Light for inspection and testing in order to get them repaired or replaced.

MECHANICAL WARRANTY

Under normal conditions, the structural integrity of Poles and Brackets shall be warranted for a period of five years. This would include normal outdoor weather conditions and where properly installed and applied. Excluded would be areas where there are corrosive conditions such as salt spray, industrial locations where chemicals may be present, and environments where birds perch or where other animals may frequent. Excessive wind conditions such as hurricanes and tornadoes would be excluded. There are No Warranties on Poles and Brackets when products are not installed properly or applied incorrectly.

FINISH WARRANTY

Under normal conditions, the painted finish shall be warranted for a period of two years. This would include normal outdoor weather conditions. Excluded would be areas where there are corrosive conditions such as salt spray, industrial locations where chemicals may be present, and environments where birds perch or where other animals may frequent.

WARRANTY CLAIMS

Prior to taking any action, warranty claims should be submitted in writing to America Light. Products need to be inspected regularly for defects; all claims need to be made within 60 days of any noted defect to prevent further damage and/or avoid abrupt failure.

SPECIFICATIONS

Specifcations are general and subject to change at anytime.

PRICING

Prices are subject to change without notice and are subject to acceptance at time of order.

FREIGHT

Pole and Brackets are shipped FOB Factory.

RETURNS

Items must be returned to America Light. Items must be returned within 30 days of purchase. Only stocked items maybe returned. Stock items returned within 30 days are subject to a 25% restock charge. Non-Stocked items are made to order and not returnable. All returns can only be used for in store credit. All returns must be pre-approved and be accompanied with a returned goods authorization (RGA) number.

TERMS

Standard terms are Net 30 days. Most major credit cards are accepted at time of order for payment. Company reserves the right to refuse credit card payment at its discretion.

ERRORS & OMISSIONS

Company will not be held responsible for any errors or omissions in pricing or specifications.

PERFORMANCE INDEMNITY

Customer agrees to indemnify and hold the company harmless for any losses incurred from performance or lack of performance by the company.

**Our Mission**

To be Leaders in American Lighting Manufacturing

Our Brand Promise

Assured Value in Specified Lighting

Our Business Scope

Manufacture, Assemble, and Brand Lighting Products

Our Reach

US and International Markets

Our Core Values

Values are the foundation of our existence, At America Light We Value:

All Relationships

A Strong Work Ethic

Service to Our Customers

Innovation

Our Company Uniques

Our Uniques allow us to fill a void in the marketplace:


Innovation in Design


Product Customization


Short Manufacturing/Assembly Lead Times

Our Guarantee

Timely Innovative Lighting Solutions

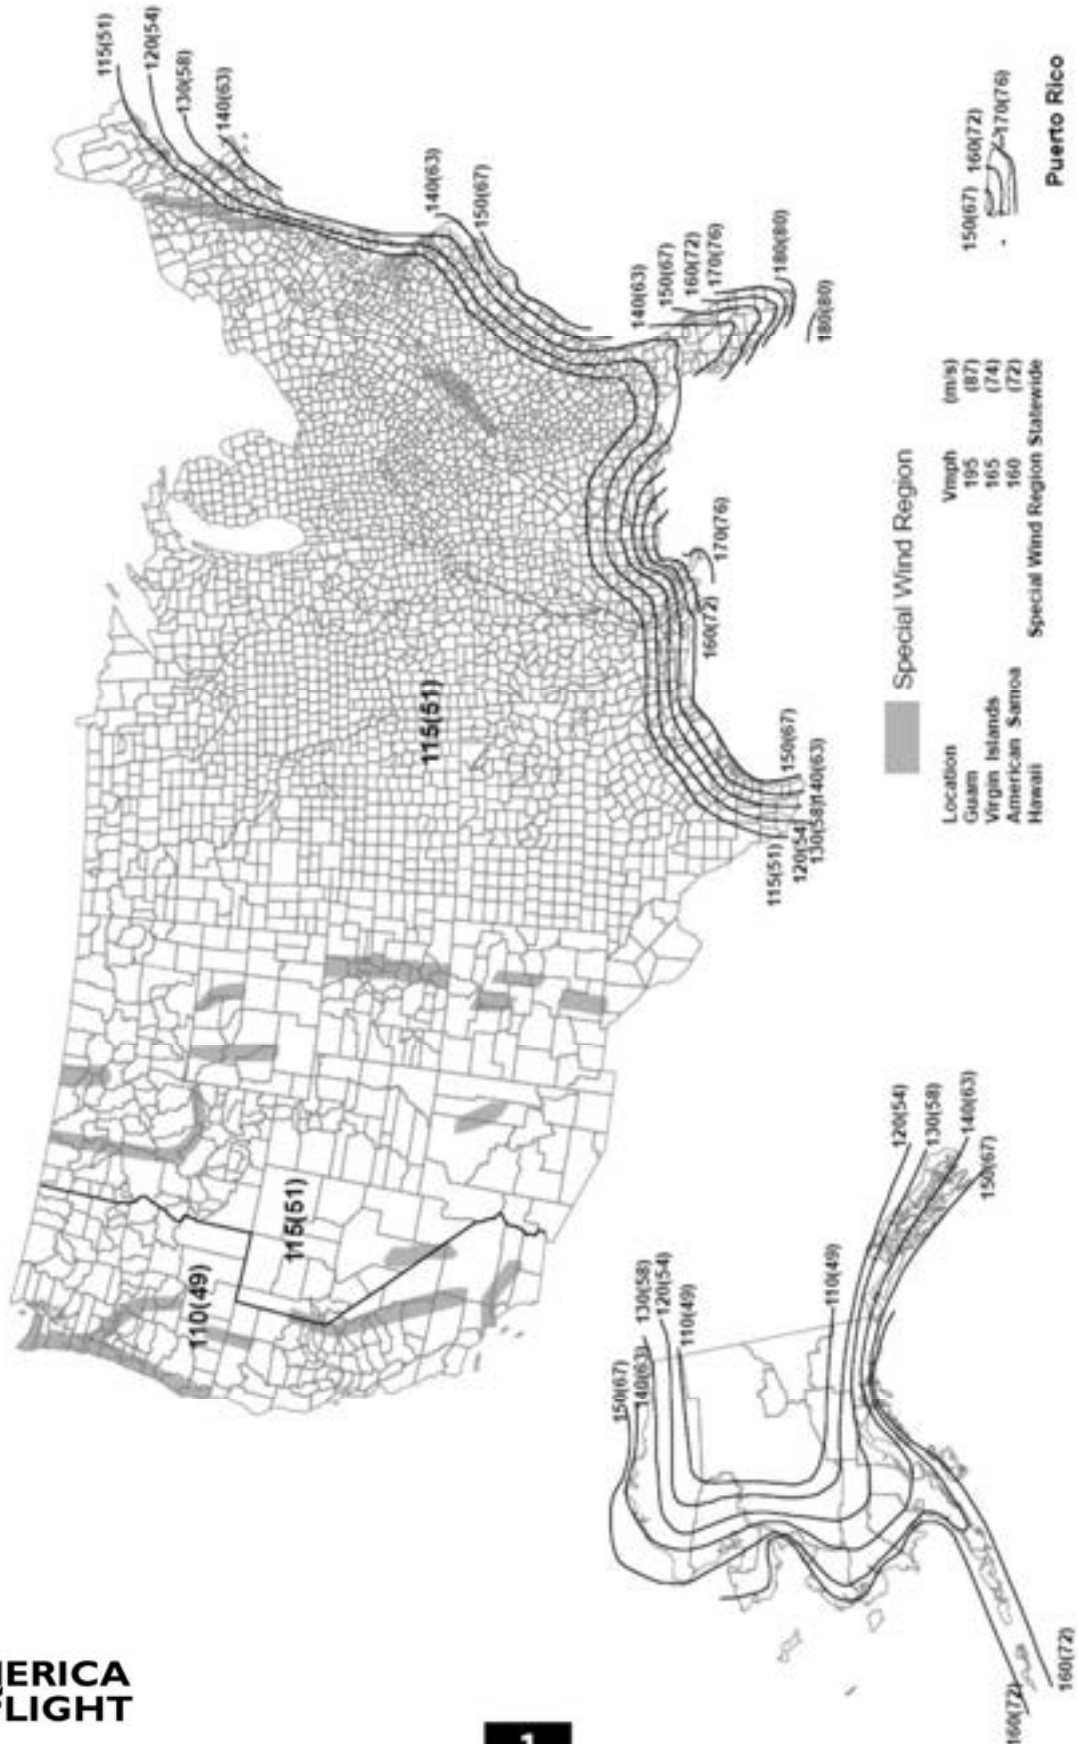

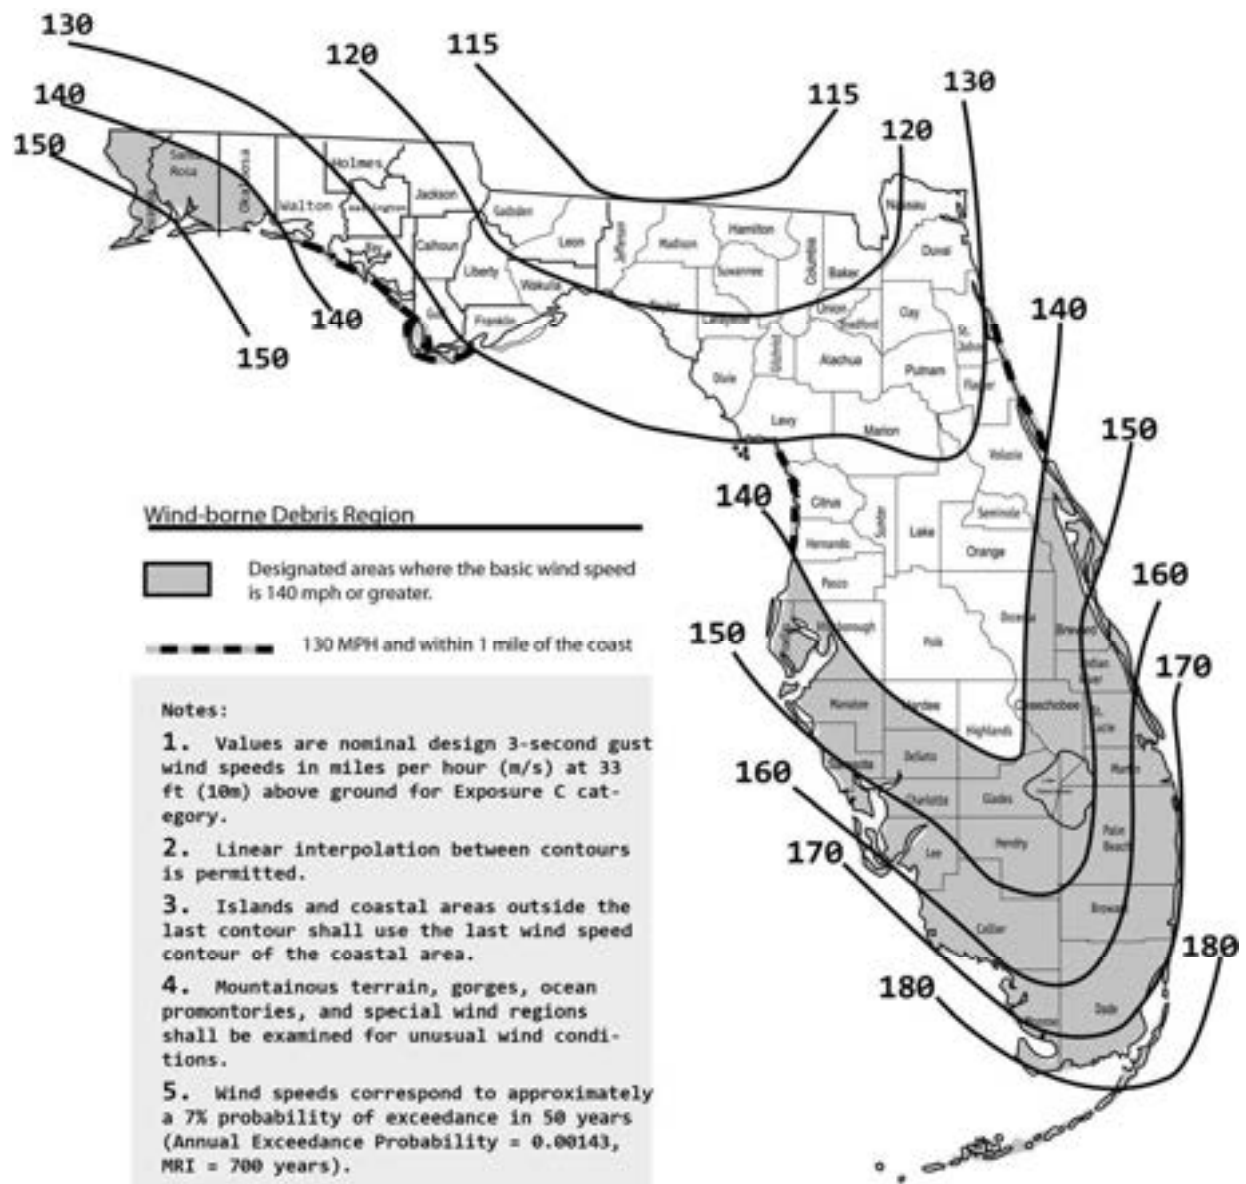

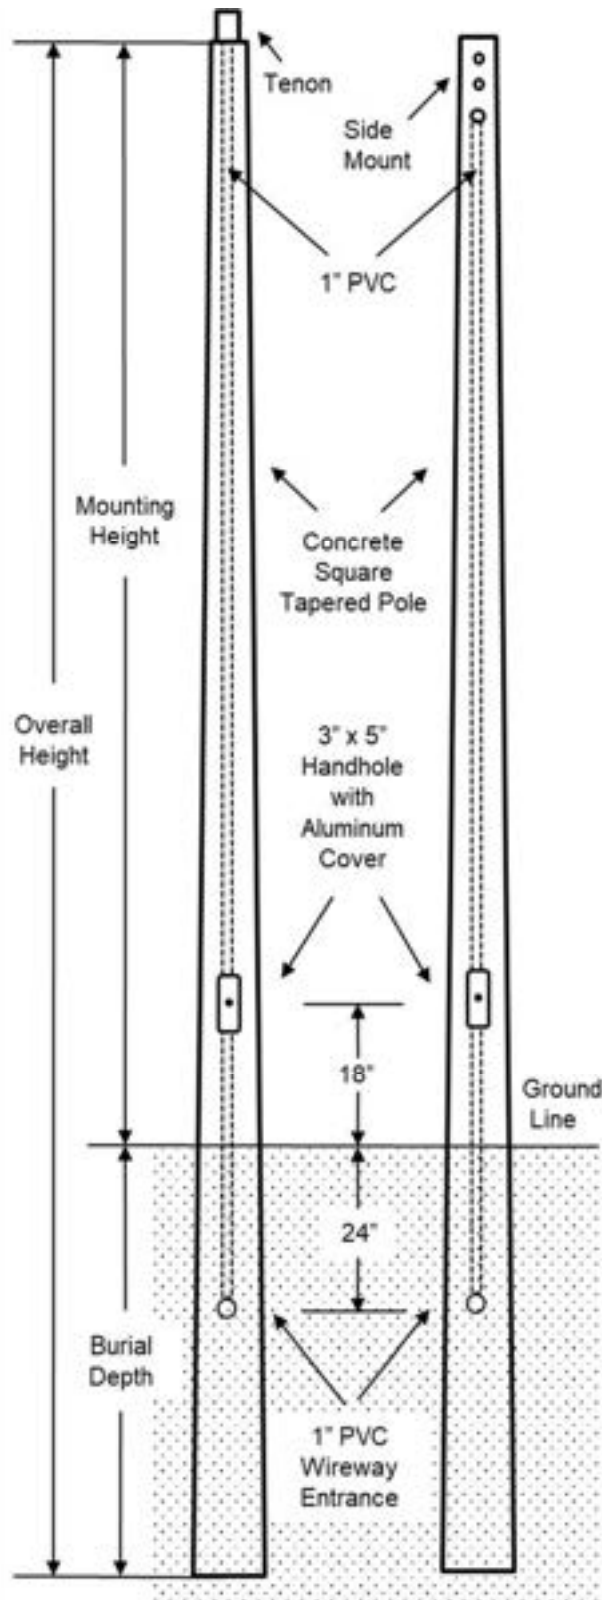**FEATURES**

- Direct Bury Installation
- Tenon or Side Mount
- 1" PVC Wireway
- Handhole Access for Wiring
- Wireway 90 for Conduit Entry

APPLICATIONS

- Parking Lots
- Roadway
- General Area



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE Square Tapered Concrete Pole		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 2

Pole Ordering/Specifying Information

PCST		
SERIES	Length ____ Feet	Mounting T 2" Tenon T3 3" Tenon CD Custom Drill

Pole Specifications - Sand Applications

Pole	Overall Height	Mounting Height	Burial Depth	Tip"/Butt"	Weight	EPA 150 MPH	EPA 170 MPH	EPA 180 MPH
PCST-17	17	10	7	4.5/7.25	600	10.8	6.6	5.0
PCST-22	22	15	7	4.5/8.0	900	7.6	4.2	2.9
PCST-28	28	20	8	5.0/9.5	1,530	9.8	5.0	3.2
PCST-34	34	25	9	5.0/10.5	2,130	12.0	6.2	3.8
PCST-40	40	30	10	6.0/12.5	3,560	15.0	7.2	4.4
PCST-45	45	35	10	6.0/13.3	4,180	8.7	1.6	--
PCST-46	46	35	11	6.0/13.5	4,570	18.1	8.9	5.5
PCST-51	51	40	11	6.5/14.8	6,060	12.0	3.0	--
PCST-58	58	45	13	6.5/16.0	7,700	29.8	16.0	10.8
PCST-63	63	50	13	6.5/16.8	9,030	28.2	14.8	9.6

EPAs are Approximate and need to be Confirmed and Certified by a Registered Professional Engineer

Specifications Subject to Change

Pole Specifications - Rock Applications


Pole	Overall Height	Mounting Height	Burial Depth	Tip"/Butt"	Weight	EPA 150 MPH	EPA 170 MPH	EPA 180 MPH
PCST-15	15	10	5	4.5/7.0	500	11.0	7.0	3.0
PCST-22	22	15	7	4.5/8.1	1,200	26.0	18.0	14.0
PCST-27	27	20	7	5/9.38	1,440	17.0	8.0	4.0
PCST-32	32	25	7	5.0/10.0	1,920	14.0	9.0	5.0
PCST-37	37	30	7	6.0/12.0	3,110	13.0	8.0	5.0
PCST-43	43	35	8	6.0/13.0	4,050	17.7	7.1	4.4
PCST-50	50	40	10	6.5/14.6	5,840	23.8	15.8	11.5
PCST-55	55	45	10	6.5/15.5	6,970	31.0	12.6	8.2
PCST-60	60	50	10	6.5/16.2	8,220	27.0	9.9	5.2

EPAs are Approximate and need to be Confirmed and Certified by a Registered Professional Engineer

Specifications Subject to Change



PROJECT		SOUTHEAST POLES	
TYPE	QTY	TITLE Square Tapered Concrete Pole	
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx	
APPROVAL		DATE 4/26/2018	SCALE N.T.S.
		SHEET 2 OF 2	

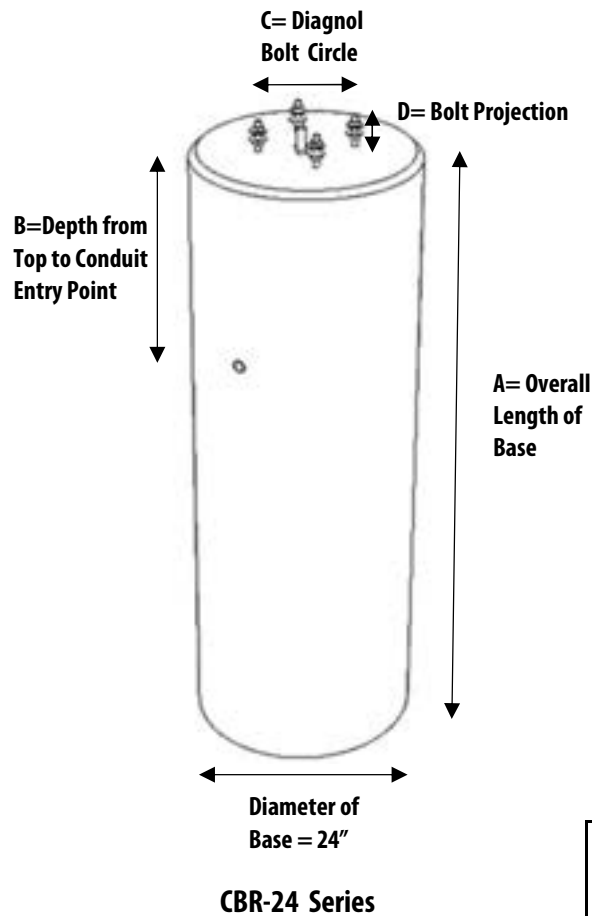

FEATURES

- Direct Bury Installation
- Suitable for Poles up to 30 Feet
- Installs at Grade or up to 48" Above
- Up to 4- 3/4" Conduit Entries
- 3 or 4 Bolt Patterns
- Bolts up to 1" x 36"
- Bolt Circles up to 14"

APPLICATIONS

- Parking Lots
- Roadways
- General Area

Notes

- 1) _____
- 2) _____
- 3) _____
- 4) _____
- 5) _____



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		24" Round Concrete Pole Base		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 2

CBR-24 Series

24" Round Concrete Pole Base

Ordering/Specifying Information

CBR-24							
SERIES	"A" FT	Conduit	"B" IN	Bolts	Bolt Circle "C" IN	Bolt Size	Bolt Proj "D" IN
	4	1C 1	24	3		IN	
	5	2C 2	30	4		X	
	6	3C 3	36			IN	
	7	4C 4	42				
	8		48				
	9		60				
	10		72				
	11						
	12						
	13						



Pole Base Specifications

Base	Length	Diameter	Base Weight	Bases Per Truck	Height Above*	Below Grade*	
CBR-24-4	4'	24"	1,815	20	8-9'	4'	
CBR-24-5	5'	24"	2,254	15	10-14'	5'	
CBR-24-6	6'	24"	2,720	14	15-20'	6'	
CBR-24-7	7'	24"	3,170	12	21-25'	7'	
CBR-24-8	8'	24"	3,625	10	26-28'	8'	
CBR-24-9	9'	24"	4,080	8	28-30'	10'	
CBR-24-10	10'	24"	4,530	8	30-34'	11'	
CBR-24-11	11'	24"	4,985	8			
CBR-24-12	12'	24"	5,440	6			
CBR-24-13	13'	24"	5,890	6			


* Pole Base Guidelines; Height Above includes Pole Height and Base Above Grade;
 Variations such as Pole/Fixture EPA and Soil Conditions Affect Properly Engineered Depth
Specifications Subject to Change

Single Entry (1C)

Double Entry (2C)

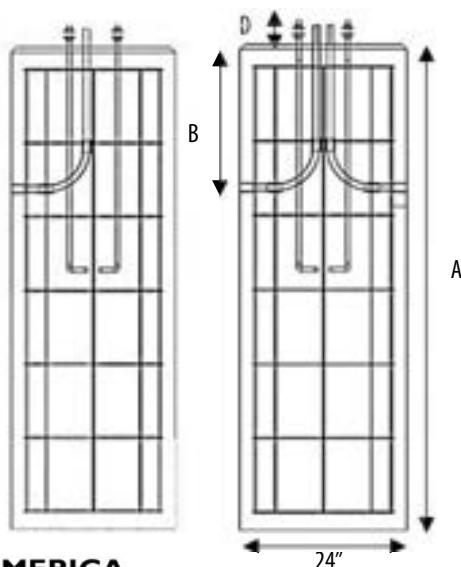

PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		24" Round Concrete Pole Base		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	2 OF 2

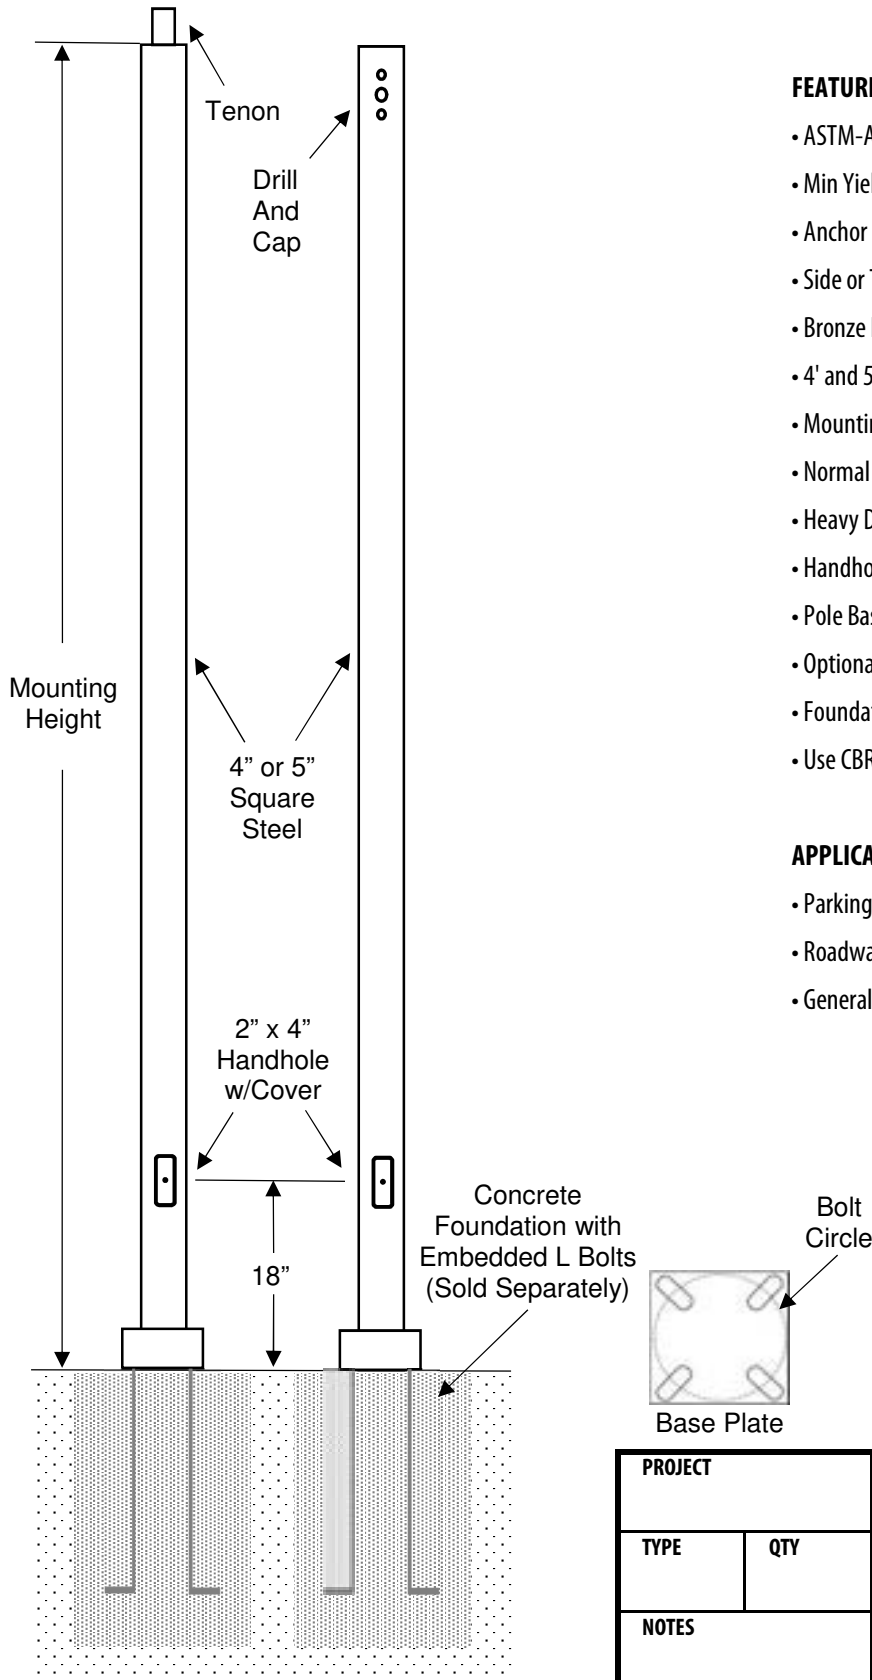


FEATURES

- ASTM-A 500 Grade B Steel
- Min Yield Strength of 46,000 PSI
- Anchor Base Installation
- Side or Tenon Mount
- Bronze Finish with Optional Colors
- 4' and 5" Square Profiles
- Mounting Heights up to 30 Feet
- Normal Duty 11 Gauge
- Heavy Duty 7 Gauge
- Handhole Access for Wiring
- Pole Base Cover Included
- Optional Bolts
- Foundation Sold Separately
- Use CBR-24 Series or Field Cast

APPLICATIONS

- Parking Areas
- Roadway
- General Area



Base Plate

PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE Square Steel Anchor Base Pole		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 2

PSS Series

Square Steel Anchor Base Pole

Pole Ordering/Specifying Information

PSS						
SERIES	Size 4 4" x 4" 5 5" x 5"	Length ___ Feet	Color BZ Bronze CC Custom Color	Duty ND Normal HD Heavy	Mount _ Drill/Cap T 2.38" Tenon	Options AB Bolts

Pole Specification Table

Pole	Length	Size	Wall Thickness	Wall Gauge	Bolt Circle	Bolts	Base Plate Sq/Thick	Max Fix Weight
PSS-4-10-ND	10	4" x 4"	.120"	11	9-11"	5/8" x 18"	10.5"/.75"	250
PSS-4-12-ND	12	4" x 4"	.120"	11	9-11"	5/8" x 18"	10.5"/.75"	250
PSS-4-14-ND	14	4" x 4"	.120"	11	9-11"	5/8" x 18"	10.5"/.75"	250
PSS-4-15-ND	15	4" x 4"	.120"	11	9-11"	5/8" x 18"	10.5"/.75"	250
PSS-4-16-ND	16	4" x 4"	.120"	11	9-11"	3/4" x 24"	10.5"/.75"	250
PSS-4-18-ND	18	4" x 4"	.120"	11	9-11"	3/4" x 24"	10.5"/.75"	250
PSS-4-20-ND	20	4" x 4"	.120"	11	9-11"	3/4" x 24"	10.5"/.75"	200
PSS-4-20-HD	20	4" x 4"	.180"	7	9-11"	1" x 36"	10.5"/.75"	250
PSS-5-20-HD	20	5" x 5"	.180"	7	10.5-12"	1" x 36"	11"/1"	250
PSS-4-25-HD	25	4" x 4"	.180"	7	9-11"	1" x 36"	11"/1"	200
PSS-5-25-HD	25	5" x 5"	.180"	7	10.5-12"	1" x 36"	11"/1"	250
PSS-5-30-HD	30	5" x 5"	.180"	7	10.5-12"	1" x 36"	11"/1"	150

Maximum EPA


Pole	120 MPH	140 MPH	150 MPH	160 MPH	170 MPH	180 MPH		
PSS-4-10-ND	20.0	14.4	12.2	10.4	9.0	7.9	-	-
PSS-4-12-ND	17.6	11.0	9.3	7.7	6.6	5.7	-	-
PSS-4-14-ND	12.7	8.6	7.1	5.8	4.8	4.0	-	-
PSS-4-15-ND	11.4	7.6	6.1	5.0	4.0	3.3	-	-
PSS-4-16-ND	10.2	6.6	5.3	4.2	3.3	2.6	-	-
PSS-4-18-ND	8.1	5.0	3.8	2.8	2.0	1.4	-	-
PSS-4-20-ND	6.3	3.6	2.5	1.6	1.0	0.5	-	-
PSS-4-20-HD	10.8	6.9	5.7	4.6	3.6	2.8	-	-
PSS-5-20-HD	19.0	12.9	10.5	8.6	6.9	5.8	-	-
PSS-4-25-HD	6.5	3.7	2.6	1.7	1.0	0.5	-	-
PSS-5-25-HD	12.2	7.5	5.7	4.2	3.0	2.0	-	-
PSS-5-30-HD	7.7	7.0	2.5	1.2	Call	Call	-	-

EPAs are Approximate and need to be Confirmed and Certified by a Registered Professional Engineer

Specifications Subject to Change



PROJECT		SOUTHEAST POLES	
TYPE	QTY	TITLE Square Steel Anchor Base Pole	
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx	
APPROVAL		DATE 4/26/2018	SCALE N.T.S.
		SHEET 2 OF 2	

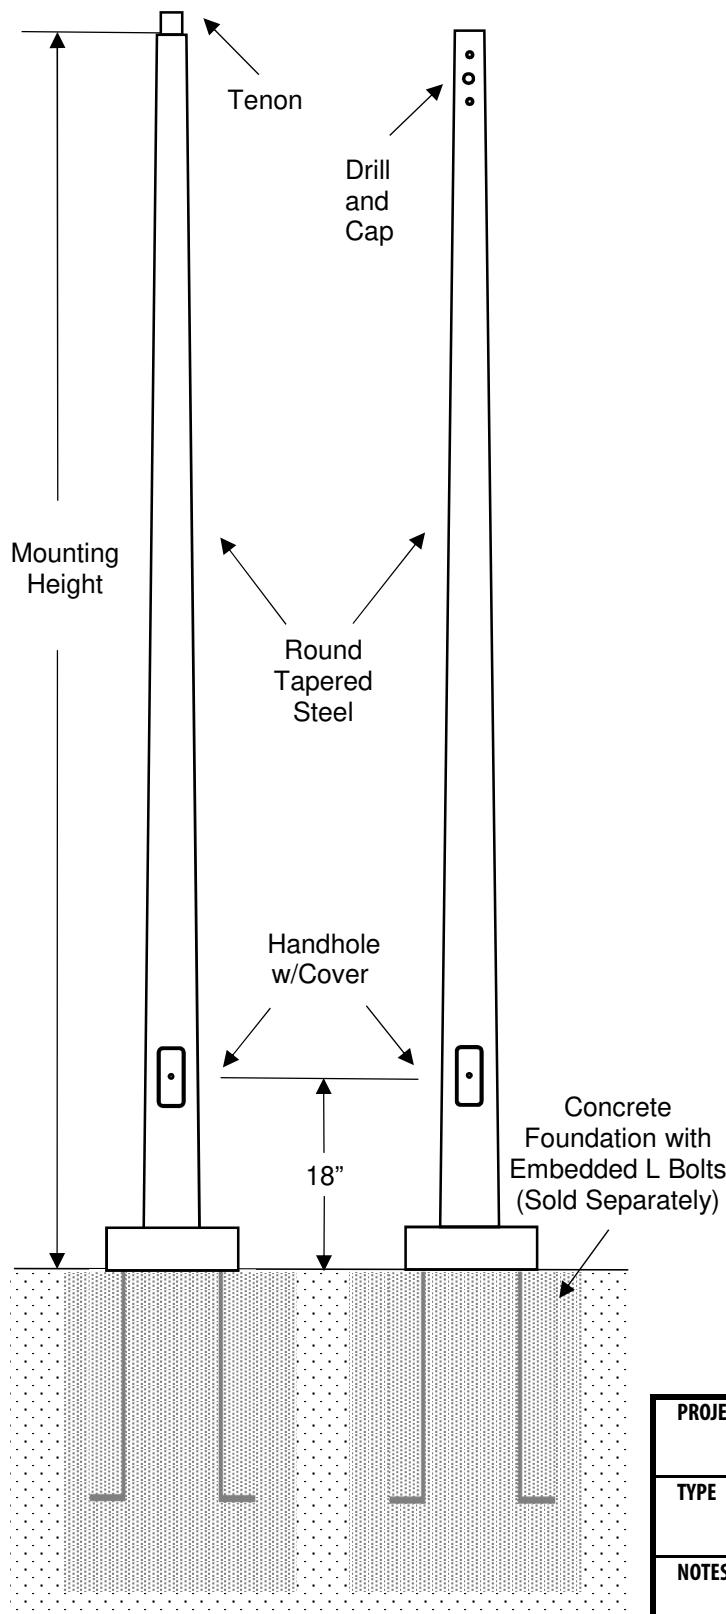


FEATURES

- ASTM-A 500 Grade C Steel Shaft
Min Yield Strength of 55,000 PSI
- Base is Hot Rolled Carbon Steel
Min Yield Strength of 36,000 PSI
- Bronze Finish with Optional Colors
- Side or Tenon Mount
- Mounting Heights up to 45 Feet
- Normal Duty 11 Gauge
- Heavy Duty 7 Gauge
- Handhole Access for Wiring
- Pole Base Cover Included
- Optional Bolts
- Foundation Sold Separately
- Use CBR24/30 Series or Field Cast

APPLICATIONS

- Parking Areas
- Roadway
- General Area



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE Round Tapered Steel Pole		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 2

PSRT Series

Round Tapered Steel Pole

Pole Ordering/Specifying Information

PSRT					
SERIES	Length ___ Feet	Color BZ Bronze CC Custom Color	Duty ND Normal HD Heavy	Mount _ Drill/Cap T 2.38" Tenon	Options AB Bolts

Pole Specification Table

Pole	Length	Butt/Tip	Wall Thickness	Wall Gauge	Bolt Circle	Bolts	Base Plate Sq/Thick	Weight
PSRT-20-ND	20	6.3"/3.5"	.120"	11	10"	1" x 36"	11"/1"	158
PSRT-24-ND	24	7.0"/3.6"	.120"	11	10"	1" x 36"	11"/1"	188
PSRT-24-HD	24	7.0"/3.6"	.180"	7	10"	1" x 36"	11"/1"	293
PSRT-25-ND	25	7.0"/3.5"	.120"	11	10"	1" x 36"	11"/1"	269
PSRT-30-ND	30	7.5"/3.3"	.120"	11	10.5"	1" x 36"	11"/1"	305
PSRT-35-ND	35	8.5"/3.6"	.120"	11	12.5"	1" x 36"	13"/1"	379
PSRT-39-ND	39	9.0"/3.5"	.120"	11	12.5"	1" x 36"	13"/1.25"	373
PSRT-39-HD	39	9.0"/3.5"	.180"	7	12.5"	1" x 36"	13"/1"	535
PSRT-45-HD	45	10.2"/4.2"	.180"	7	15.0"	1.25" x 42"	11"/1"	800

Maximum EPA (MPH)

Pole	120 MPH	140 MPH	150 MPH	160 MPH	170 MPH	180 MPH		
PSRT-20-ND	12.5	8.5	7.1	5.9	5.0	4.1	-	-
PSRT-24-ND	12.3	7.2	5.4	3.9	2.7	1.6	-	-
PSRT-24-HD	16.3	11.0	9.2	7.6	6.4	5.3	-	-
PSRT-25-ND	11.1	6.5	4.9	3.5	2.4	1.4	-	-
PSRT-30-ND	6.3	3.9	3.1	2.4	1.8	1.3	-	-
PSRT-35-ND	6.2	3.6	2.7	2.0	1.4	0.8	-	-
PSRT-39-ND	5.0	2.5	1.7	1.0	0.4	-	-	-
PSRT-39-HD	10.6	6.0	4.4	3.0	1.8	1.0	-	-
PSRT-45-HD	8.2	5.5	4.6	3.8	3.2	2.7	-	-


EPAs are Approximate and need to be confirmed and certified by a Registered Professional Engineer

Specifications Subject to Change



10


PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE Round Tapered Steel Pole		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 2 OF 2

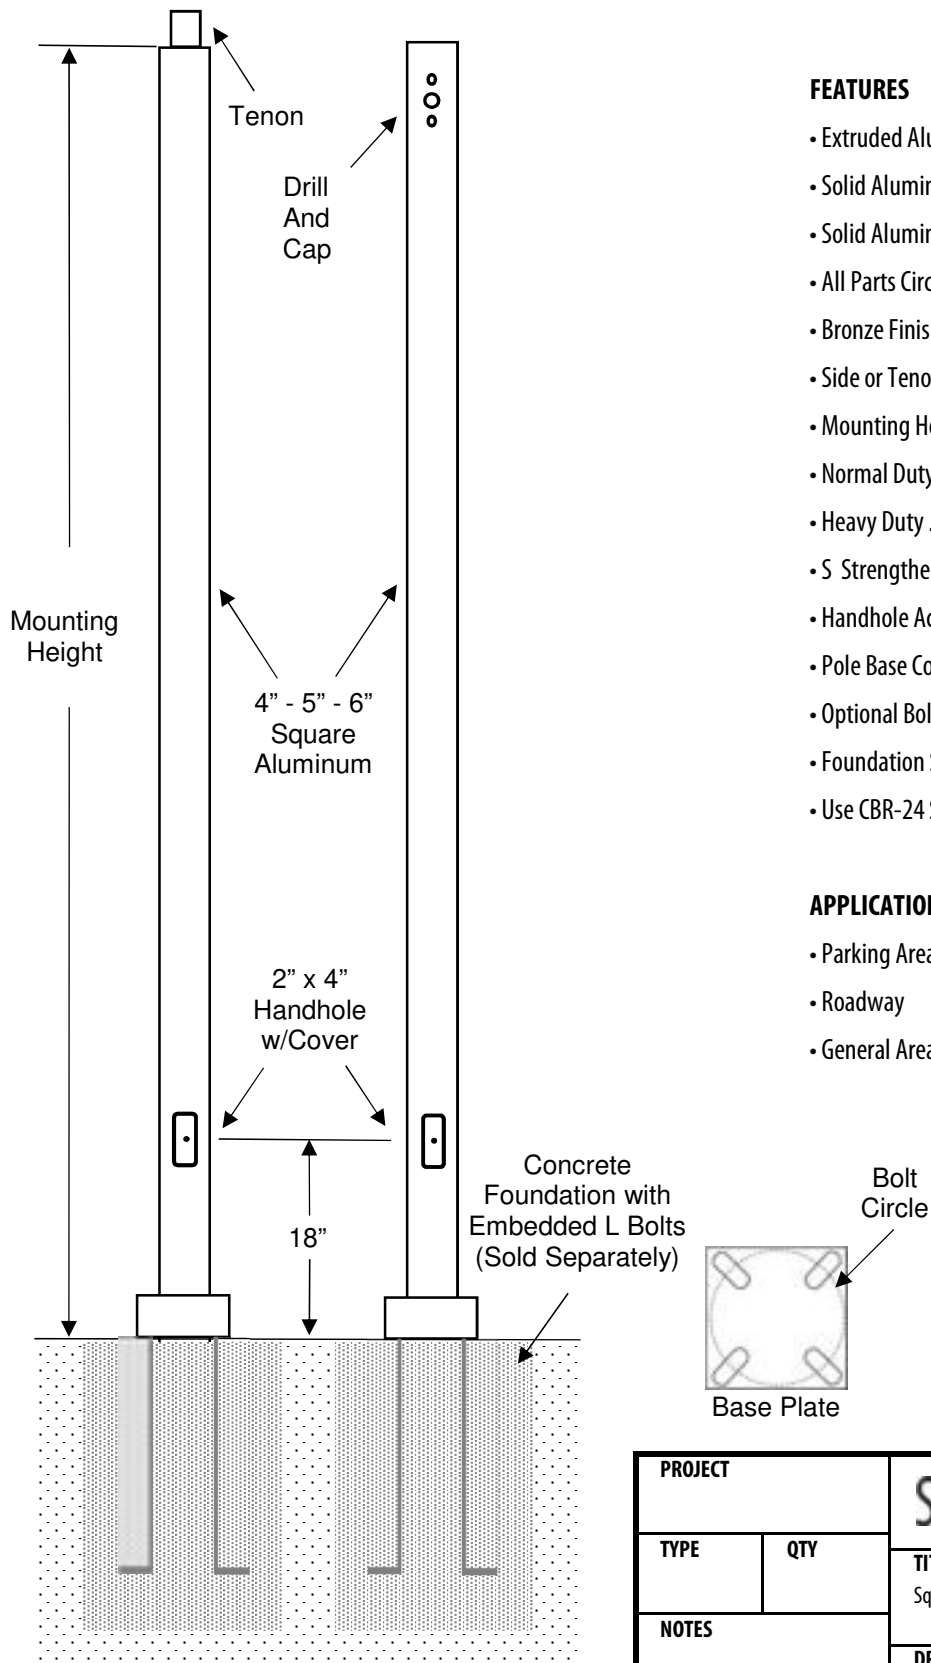**FEATURES**

- Extruded Aluminum Tube
- Solid Aluminum Base Plate
- Solid Aluminum Gussets
- All Parts Circumferentially Welded
- Bronze Finish with Optional Colors
- Side or Tenon Mount
- Mounting Heights up to 30 Feet
- Normal Duty .125 Wall
- Heavy Duty .25 Wall
- S Strengthening Process Option
- Handhole Access for Wiring
- Pole Base Cover Included
- Optional Bolts
- Foundation Sold Separately
- Use CBR-24 Series or Field Cast

APPLICATIONS

- Parking Areas
- Roadway
- General Area



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE Square Aluminum Pole		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 2

PAS Series

Square Aluminum Pole

Pole Ordering/Specifying Information

PAS						
SERIES	Size 4 4" x 4" 5 5" x 5" 6 6" x 6"	Length ___ Feet	Color BZ Bronze CC Custom Color	Duty ND Normal HD Heavy S Strength	Mount _ Drill/Cap T 2.38" Tenon	Options AB Bolts

Pole Specification Table

Pole	Length	Size	Wall Thickness	Bolt Circle	Bolts	Base Plate Sq/Thick		
PAS-4-10-ND	10	4" x 4"	.125"	8.5-11"	5/8" x 18"	10.65"/.75"		
PAS-4-12-ND	12	4" x 4"	.125"	8.5-11"	5/8" x 18"	10.65"/.75"		
PAS-4-14-ND	14	4" x 4"	.125"	8.5-11"	5/8" x 18"	10.65"/.75"		
PAS-4-15-ND-S	15	4" x 4"	.125"-S	8.5-11"	5/8" x 18"	10.65"/.75"		
PAS-4-15-HD	15	4" x 4"	.250"	8.5-11"	3/4" x 24"	10.65"/.75"		
PAS-4-16-HD	16	4" x 4"	.250"	8.5-11"	3/4" x 24"	10.65"/.75"		
PAS-4-18-HD	18	4" x 4"	.250"	8.5-11"	3/4" x 24"	10.65"/.75"		
PAS-4-20-HD-S	20	4" x 4"	.250"-S	8.5-11"	3/4" x 30"	10.65"/1"		
PAS-5-20-HD	20	5" x 5"	.250"	8.5-11"	3/4" x 30"	10.65"/1"		
PAS-5-24-HD-S	24	5" x 5"	.250"-S	9-11"	1" x 36"	10.65"/1"		
PAS-5-25-HD-S	25	5" x 5"	.250"-S	9-11"	1" x 36"	10.65"/1"		
PAS-6-25-HD-S	25	6" x 6"	.250"-S	11-13"	1" x 36"	12"/1.5"		
PAS-6-30-HD-S	30	6" x 6"	.250"-S	11-13"	1" x 36"	12"/1.5"		

EPA


Pole	120 MPH	140 MPH	150 MPH	160 MPH	170 MPH	180 MPH		
PAS-4-10-ND	7.4	5.3	4.4	3.7	3.2	2.8		
PAS-4-12-ND	5.8	4.0	3.3	2.7	2.2	1.9		
PAS-4-14-ND	4.5	3.0	3.0	1.9	1.5	1.2		
PAS-4-15-ND-S	7.2	4.6	3.6	2.8	2.1	1.6		
PAS-4-15-HD	10.6	6.5	5.3	4.4	3.5	2.9		
PAS-4-16-HD	8.6	5.7	4.7	3.8	3.0	2.4		
PAS-4-18-HD	6.3	4.2	3.4	2.7	2.2	1.8		
PAS-4-20-HD-S	10.1	6.5	5.1	3.9	2.9	2.2		
PAS-5-20-HD	8.9	5.9	4.7	3.8	3.0	2.4		
PAS-5-24-HD-S	14.2	9.4	7.5	6.0	4.8	3.8		
PAS-5-25-HD-S	12.5	8.3	6.6	5.3	4.2	3.4		
PAS-6-25-HD-S	13.8	9.3	7.6	6.2	5.1	4.2		
PAS-6-30-HD-S	11.0	7.4	6.1	5.0	4.0	3.4		

EPAs are Approximate and need to be Confirmed and Certified by a Registered Professional Engineer
 Strengthening Process can be Modified to Produce Higher EPAs
 Consult Factory
Specifications Subject to Change



12

PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE Square Aluminum Pole		
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
		DATE 4/26/2018	SCALE N.T.S.	SHEET 2 OF 2

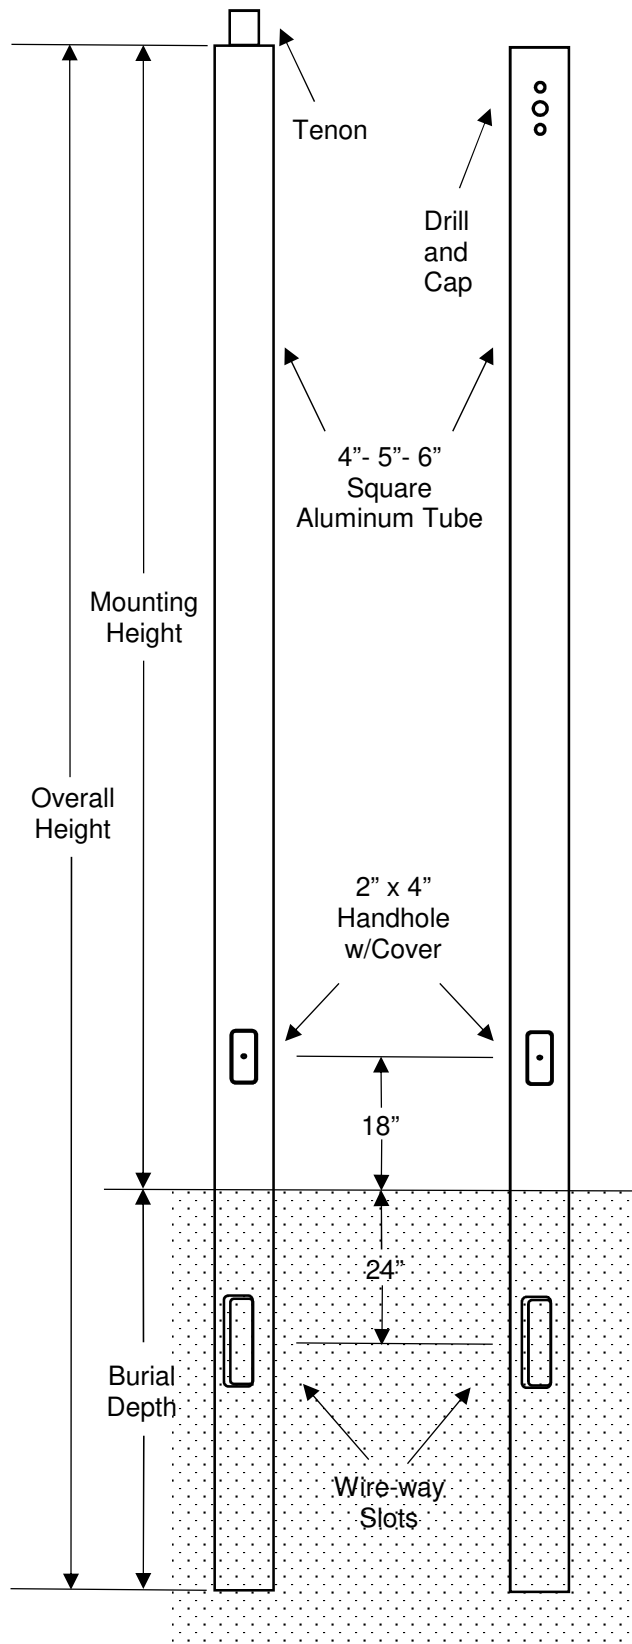

FEATURES

- Extruded Aluminum Tube
- Bronze Finish with Optional Colors
- Side or Tenon Mount
- Mounting Heights up to 25 Feet
- Normal Duty .125 Wall
- Heavy Duty .25 Wall
- S Strengthening Process Option
- Handhole Access for Wiring
- Wireway for Conduit Entry

APPLICATIONS

- Parking Areas
- Roadway
- General Area



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		Square Aluminum Pole-Direct Bury		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 2

PAS-DB Series

Square Aluminum Pole-Direct Bury

Pole Ordering/Specifying Information

PAS-DB					
SERIES	Size 4 4" x 4" 5 5" x 5" 6 6" x 6"	Length ___ Feet	Color BZ Bronze CC Custom Color	Duty ND Normal HD Heavy S Strength	Mount ___ Drill/Cap T 2.38" Tenon

Pole Specification Table

Pole	Length	Mounting Height	Burial Depth	Size	Wall Thickness			
PAS-DB-4-16-ND	16	10	6	4" x 4"	.125"			
PAS-DB-4-18-ND	18	12	6	4" x 4"	.125"			
PAS-DB-4-20-ND	20	14	6	4" x 4"	.125"			
PAS-DB-4-23-ND	23	15	8	4" x 4"	.125"			
PAS-DB-4-24-ND	24	16	8	4" x 4"	.125"			
PAS-DB-4-24-HD	24	16	8	4" x 4"	.250"			
PAS-DB-5-24-HD	24	16	8	5" x 5"	.250"			
PAS-DB-5-26-HD-S	26	18	8	5" x 5"	.250"-S			
PAS-DB-5-28-HD-S	28	20	8	5" x 5"	.250"-S			
PAS-DB-5-34-HD-S	34	25	9	5" x 5"	.250"-S			
PAS-DB-6-34-HD-S	34	25	9	6" x 6"	.250"-S			
PAS-DB-6-44-HD-S	44	30	14	6" x 6"	.250"-S			

Maximum EPA


Pole	120 MPH	140 MPH	150 MPH	160 MPH	170 MPH	180 MPH		
PAS-DB-4-16-ND	7.4	5.3	4.4	3.7	3.2	2.8		
PAS-DB-4-18-ND	5.8	4.0	3.3	2.7	2.2	1.9		
PAS-DB-4-20-ND	4.5	3.0	2.4	1.9	1.5	1.2		
PAS-DB-4-23-ND	4.0	2.6	2.0	1.6	1.2	0.9		
PAS-DB-4-24-ND	3.6	2.2	1.7	1.3	0.9	0.6		
PAS-DB-4-24-HD	8.6	5.7	4.7	3.8	3.0	2.4		
PAS-DB-5-24-HD	14.6	10.0	8.2	6.7	5.5	4.6		
PAS-DB-5-26-HD-S	14.2	9.9	8.3	6.9	5.8	5.0		
PAS-DB-5-28-HD-S	11.7	8.0	6.5	5.3	4.4	3.7		
PAS-DB-5-34-HD-S	8.9	5.9	4.7	3.8	3.0	2.4		
PAS-DB-6-34-HD-S	13.8	9.3	7.6	6.2	5.1	4.2		
PAS-DB-6-44-HD-S	8.8	5.4	4.1	3.0	2.1	1.5		

EPAs are Approximate and need to be Confirmed and Certified
by a Registered Professional Engineer
Strengthening Process can significantly increase EPAs if needed
Consult Factory
Specifications Subject to Change



14

PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE Square Aluminum Pole-Direct Bury		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 2 OF 2

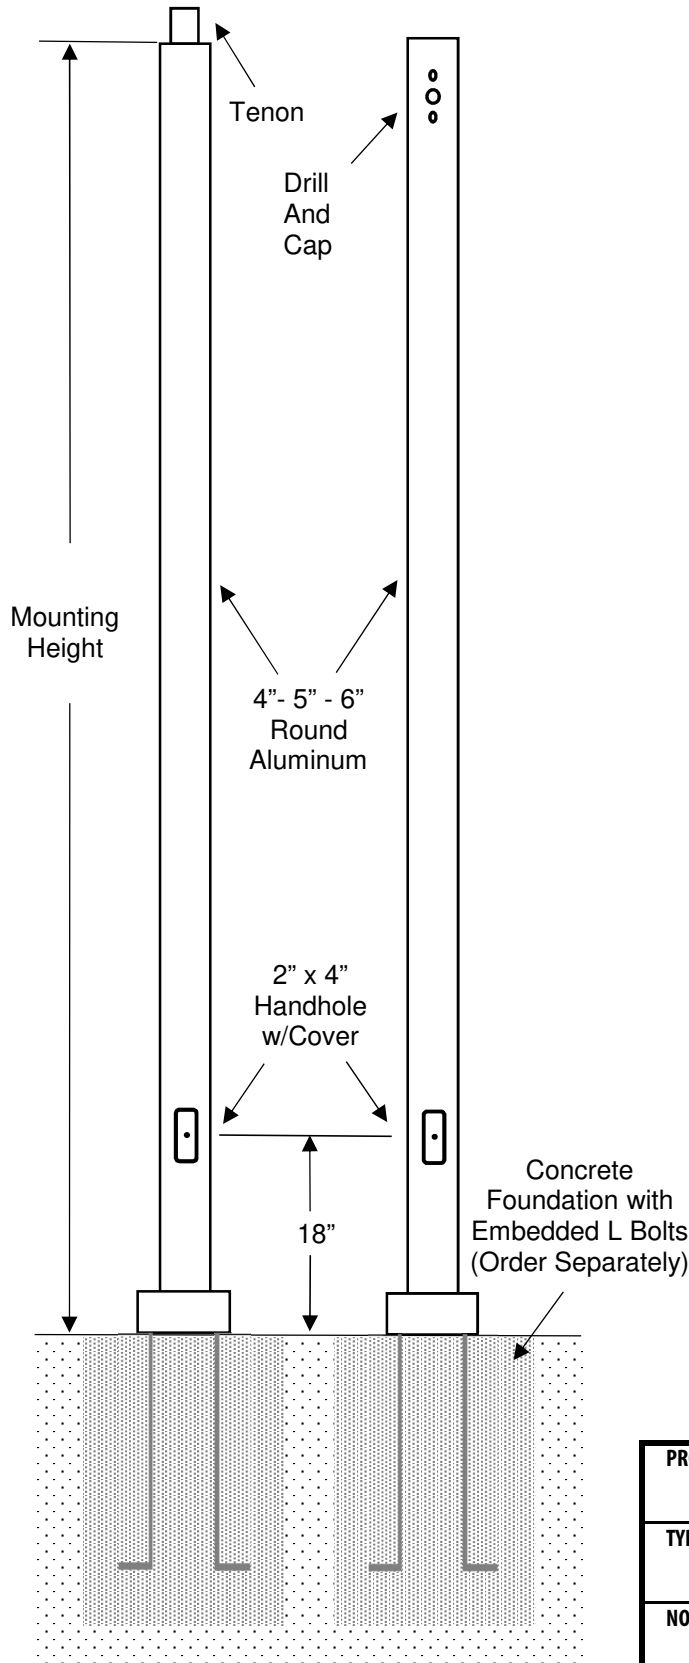


FEATURES

- Extruded Aluminum Tube
- Solid Aluminum Base Plate
- Solid Aluminum Gussets
- All Parts Circumferentially Welded
- Bronze Finish with Optional Colors
- Side or Tenon Mount
- Mounting Heights up to 30 Feet
- Normal Duty .125 Wall
- Medium Duty .188 Wall
- Heavy Duty .250 Wall
- S Strengthening Process Option
- Handhole Access for Wiring
- Pole Base Cover Included
- Optional Bolts
- Foundation Sold Separately
- Use CBR-24 or Field Cast

APPLICATIONS

- Parking Areas
- Roadway
- General Area



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		Round Aluminum Pole - Anchor Base		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 2

PAR Series

Round Aluminum Pole - Anchor Base

Pole Ordering/Specifying Information

PAR						
SERIES	Size 4 4" 5 5" 6 6"	Length ___ Feet	Color BZ Bronze CC Custom Color	Duty ND Normal MD Medium HD Heavy S Strength Process	Mount ___ Drill/Cap T 2.38" Tenon	Options AB Bolts

Pole Specification Table

Pole	Length	Size	Wall Thickness	Bolt Circle	Base Plate Sq/Thick	Bolts		
PAR-4-10-ND	10	4"	0.125	8.5"-11"	10.65"/.75"	5/8" X 18"	-	-
PAR-4-12-ND	12	4"	0.125	8.5"-11"	10.65"/.75"	5/8" X 18"	-	-
PAR-4-14-ND-S	14	4"	.125-S	8.5"-11"	10.65"/.75"	5/8" X 18"	-	-
PAR-4-15-ND-S	15	4"	.125-S	8.5"-11"	10.65"/.75"	5/8" X 18"	-	-
PAR-5-15-MD	15	5"	0.188	8.5"-11"	10.65"/.75"	3/4" x 24"	-	-
PAR-5-16-MD	16	5"	0.188	8.5"-11"	10.65"/.75"	3/4" x 24"	-	-
PAR-5-18-MD	18	5"	0.188	8.5"-11"	10.65"/.75"	3/4" x 24"	-	-
PAR-5-20-MD	20	5"	0.188	8.5"-11"	10.65"/1"	3/4" x 30"	-	-
PAR-5-20-MD-S	20	5"	.188-S	8.5"-11"	10.65"/1"	3/4" x 30"	-	-
PAR-5-25-MD-S	25	5"	.188-S	8.5"-11"	10.65"/1"	1" x 36"	-	-
PAR-6-25-MD-S	25	6"	.25-S	11"-13"	12"/1.5"	1" x 36"	-	-
PAR-6-30-MD-S	30	6"	.25-S	11"-13"	12"/1.5"	1" x 36"	-	-

EPA


Pole	120 MPH	140 MPH	150 MPH	160 MPH	170 MPH	180 MPH		
PAR-4-10-ND	4.1	2.8	2.3	1.9	1.7	1.5	-	-
PAR-4-12-ND	2.9	1.9	1.4	1.2	1.0	0.8	-	-
PAR-4-14-ND-S	5.1	3.3	2.5	2.1	1.8	1.5	-	-
PAR-4-15-ND-S	4.4	2.8	2.2	1.8	1.5	1.3	-	-
PAR-5-15-MD	5.8	4.1	3.5	2.9	2.5	2.2	-	-
PAR-5-16-MD	4.8	3.4	2.9	2.5	2.1	1.9	-	-
PAR-5-18-MD	3.7	2.6	2.2	1.8	1.6	1.4	-	-
PAR-5-20-MD	2.8	1.9	1.6	1.3	1.1	0.9	-	-
PAR-5-20-MD-S	9.6	6.8	5.8	4.9	4.2	3.7	-	-
PAR-5-25-MD-S	5.6	3.8	3.1	2.6	2.1	1.8	-	-
PAR-6-25-MD-S	13.1	9.4	8.0	6.8	5.9	5.2	-	-
PAR-6-30-MD-S	11.8	8.5	7.2	6.1	5.3	4.7	-	-

EPAs are Approximate and need to be Confirmed and Certified by
a Registered Professional Engineer
Strengthening Process can be Modified to Produce Higher EPAs
Consult Factory
Specifications Subject to Change



16

PROJECT		SOUTHEAST POLES	
TYPE	QTY		
NOTES		TITLE Round Aluminum Pole - Anchor Base	
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx	
DATE 4/26/2018	SCALE N.T.S.	SHEET 2 OF 2	

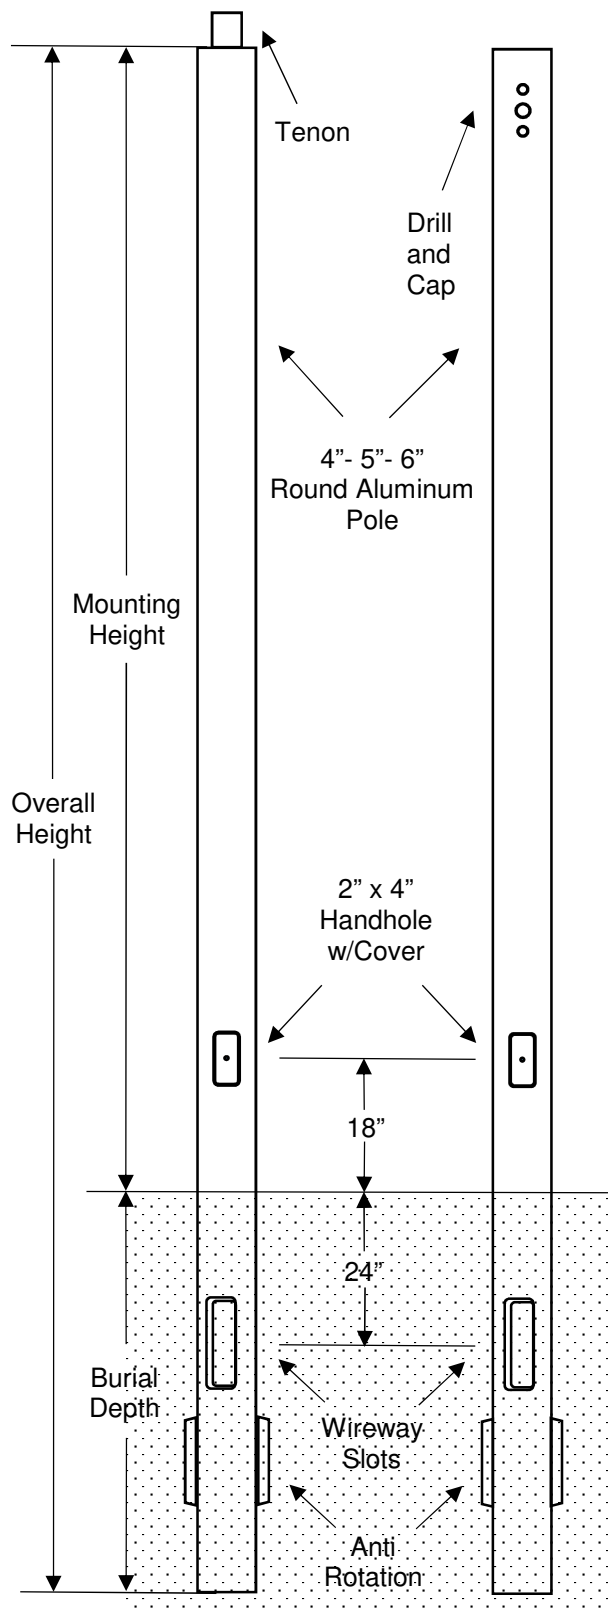

FEATURES

- Extruded Aluminum Tube
- Bronze Finish with Optional Colors
- Side or Tenon Mount
- Mounting Heights up to 30 Feet
- Normal Duty .125 Wall
- Medium Duty .188 Wall
- Heavy Duty .250 Wall
- S Strengthening Process Option
- Wireway Slots for Conduit Entry
- Anti-Rotation for Stability
- Handhole Access for Wiring
- Direct Bury Installation

APPLICATIONS

- Parking Areas
- Roadway
- General Area



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE Round Aluminum Pole-Direct Bury		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 2

PAR-DB Series

Round Aluminum Pole-Direct Bury

Pole Ordering/Specifying Information

PAR-DB					
SERIES	Size 4 4" 5 5" 6 6"	Length ___ Feet	Color BZ Bronze CC Custom Color	Duty ND Normal MD Medium HD Heavy S Strength Process	Mount ___ Drill/Cap T 2.38" Tenon

Pole Specification Table

Pole	Overall Height	Mounting Height	Burial Depth	Size	Wall Thickness			
PAR-DB-4-16-ND	16	10	6	4"	0.125			
PAR-DB-4-18-ND	18	12	6	4"	0.125			
PAR-DB-4-20-ND	20	14	6	4"	0.125			
PAR-DB-5-22-MD	22	15	7	5"	0.188			
PAR-DB-5-24-MD	24	16	8	5"	0.188			
PAR-DB-5-26-MD-S	26	18	8	5"	.188-S			
PAR-DB-5-28-MD-S	28	20	8	5"	.188-S			
PAR-DB-5-34-MD-S	34	25	9	5"	.188-S			
PAR-DB-6-34-HD-S	34	25	9	6"	.250-S			
PAR-DB-6-44-HD-S	44	30	14	6"	.250-S			

Maximum EPA


Pole	120 MPH	140 MPH	150 MPH	160 MPH	170 MPH	180 MPH		
PAR-DB-4-16-ND	7.2	4.8	4.0	3.4	2.9	2.6		
PAR-DB-4-18-ND	5.1	3.3	2.5	2.1	1.8	1.5		
PAR-DB-4-20-ND	3.6	2.0	1.4	1.1	0.8	0.7		
PAR-DB-5-22-MD	8.6	6.1	5.2	4.4	3.8	3.3		
PAR-DB-5-24-MD	7.2	5.1	4.4	3.7	3.2	2.8		
PAR-DB-5-26-MD-S	10.1	7.1	6.1	5.1	4.4	3.9		
PAR-DB-5-28-MD-S	7.8	5.4	4.5	3.8	3.3	2.8		
PAR-DB-5-34-MD-S	5.9	4.0	3.3	2.7	2.2	1.9		
PAR-DB-6-34-HD-S	13.8	9.9	8.4	7.1	6.2	5.5		
PAR-DB-6-44-MD-S	8.4	5.8	4.8	4.0	3.4	2.9		

EPAs are Approximate and need to be Confirmed and Certified by a Registered Professional Engineer
Strengthening Process can be Modified to Produce Higher EPAs
Consult Factory
Specifications Subject to Change



18


PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE Round Aluminum Pole-Direct Bury		
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
		DATE 4/26/2018	SCALE N.T.S.	SHEET 2 OF 2

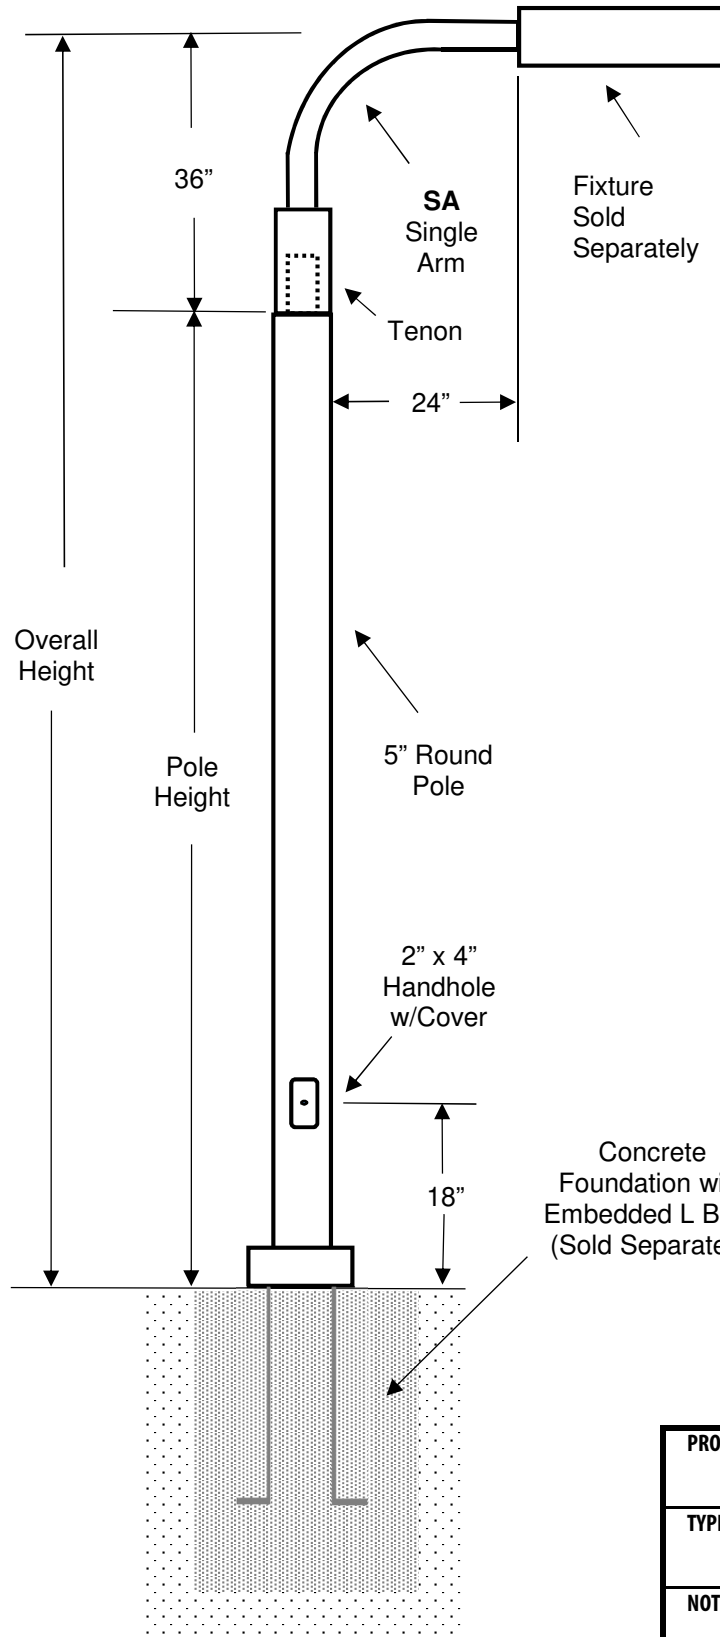**FEATURES**

- 5" Extruded Aluminum Tube
- Solid Aluminum Base Plate
- Solid Aluminum Gussets
- All Parts Circumferentially Welded
- Bronze Finish with Optional Colors
- Overall Heights up to 25 Feet
- Handhole Access for Wiring
- Pole Base Cover Included
- 8.5"-11" Bolt Circle
- Optional 1" x 36" L Bolts
- For Fixtures with 2.38 Slip Fitter
- Wind Rated for Fixtures with No Tilt
- Wind Rated up to 180 MPH
- Fixture Sold Separately
- Foundation Sold Separately
- Use CBR-24 Base or Field Cast

APPLICATIONS

- General Court Lighting
- Tennis Court Lighting
- Basketball Court Lighting




PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		Round Aluminum Tennis Pole		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 2

PAT Series

Round Aluminum Tennis Pole

Pole Ordering/Specifying Information

PAT						
SERIES	Height 18 18 Feet 20 20 Feet 22 22 Feet 24 24 Feet 25 25 Feet	Arm SA DA180 DA90 Quad	Color BZ Bronze CC Custom Color	Duty ND Normal MD Medium HD Heavy S Strength Process	Mount _ Drill/Cap T 2.38" Tenon	Options AB Bolts

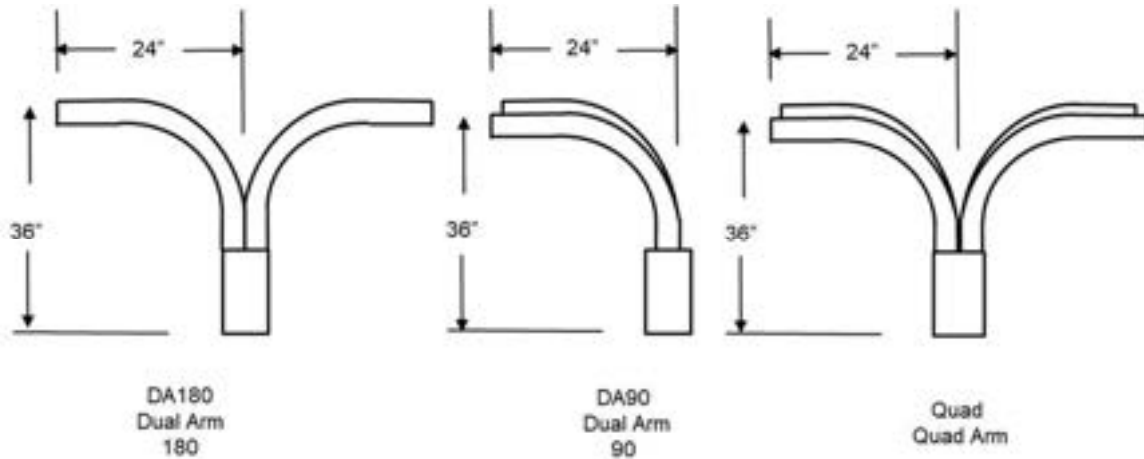


Pole Specification Table

Pole	Overall Height	Pole Height	Arm Height	Wall Thickness	Bolt Circle	Base Plate Sq/Thick	Bolts	
PAT-18	18	15	3	.188"-S	8.5"-11"	10.65"/1"	1" x 36"	-
PAT-20	20	17	3	.188"-S	8.5"-11"	10.65"/1"	1" x 36"	-
PAT-22	22	19	3	.188"-S	8.5"-11"	10.65"/1"	1" x 36"	-
PAT-24	24	21	3	.188"-S	11"-13"	12"/1.5"	1" x 36"	-
PAT-25	25	22	3	.188"-S	11"-13"	12"/1.5"	1" x 36"	-

Specifications Subject to Change



PROJECT		SOUTHEAST POLES	
TYPE	QTY	TITLE Round Aluminum Tennis Pole	
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx	
APPROVAL		DATE 4/26/2018	SCALE N.T.S.
		SHEET 2 OF 2	

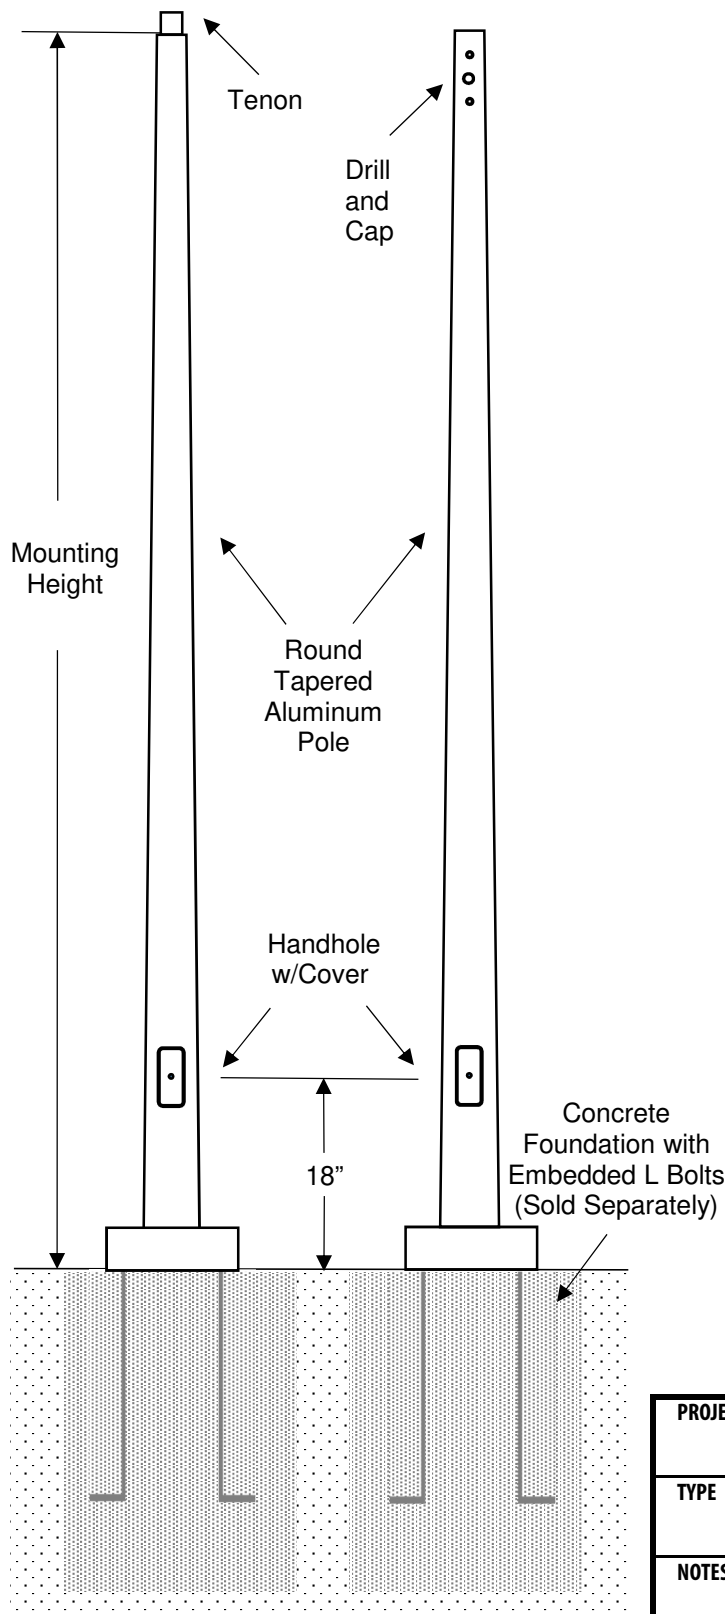


FEATURES

- 6063-T6 Aluminum Shaft
- Base is 356-T6 Aluminum Alloy
- Brushed Aluminum Finish or Bronze Powder Coat Finish
- Optional Colors and Finishes
- Side or Tenon Mount
- Mounting Heights up to 39 Feet
- Handhole Access for Wiring
- Pole Base Cover Included
- Optional Bolts
- Foundation Sold Separately
- Use CBR-24/30 Base or Field Cast

APPLICATIONS

- Parking Areas
- Roadway
- General Area



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		Round Tapered Aluminum Pole		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 2

PART Series

Round Tapered Aluminum Pole

Pole Ordering/Specifying Information

PART						
SERIES	Length ___ Feet	Butt Dia ___ Inches	Color BA Brushed BZ Bronze CC Custom Color	Duty SD Standard MD Medium HD Heavy	Mount _ Drill/Cap T 2.38" Tenon	Options AB Bolts

Pole Specification Table

Pole	Length	Butt/Tip	Wall Thickness	Bolt Circle	Base Plate Sq/Thick	Bolts		
PART-20-6-MD	20	6.0"/4.0"	0.188	9.5"	10.25"/.75"	.75' X 17"		
PART-20-7-SD	20	7.0"/4.0"	0.156	10.5"	10.25"/.75"	.75' X 17"		
PART-25-7-SD	25	7.0"/4.0"	0.156	10.5"	10.25"/.75"	1" x 36"		
PART-25-8-SD	25	8.0"/4.5"	0.156	11.5"	11.5"/.88"	1" x 36"		
PART-25-8-MD	25	8.0"/4.5"	0.188	11.5"	11.5"/.88"	1" x 36"		
PART-30-8-MD	30	8.0"/4.5"	0.188	11.5"	11.5"/.88"	1" x 36"		
PART-30-10-MD	30	10.0"/6.0"	0.188	14.5"	14.5"/1.13"	1" x 36"		
PART-35-8-MD	35	8.0"/4.5"	0.188	11.5"	11.5"/.88"	1" x 36"		
PART-35-8-HD	35	8.0"/4.5"	0.250	11.5"	11.5"/.88"	1" x 36"		
PART-35-10-MD	35	10.0"/6.0"	0.188	14.5"	14.5"/1.13"	1" x 36"		
PART-39-10-MD	39	10.0"/6.0"	0.188	14.5"	14.5"/1.13"	1" x 36"		
PART-39-10-HD	39	10.0"/6.0"	0.250	14.5"	14.5"/1.13"	1.25" x 48"		


Maximum EPA

Pole	120 MPH	140 MPH	150 MPH	160 MPH	170 MPH	180 MPH		
PART-20-6-MD	10.4	7.3	6.2	5.3	4.6	4.0		
PART-20-7-SD	12.6	8.9	7.6	6.6	5.7	5.0		
PART-25-7-SD	8.1	5.4	4.6	3.8	3.3	2.8		
PART-25-8-SD	11.8	8.2	7.0	6.0	5.1	4.5		
PART-25-8-MD	14.8	10.5	9.0	7.7	6.6	5.8		
PART-30-8-MD	10.2	7.0	5.9	5.0	4.2	3.7		
PART-30-10-MD	19.4	14.0	11.9	10.2	8.8	7.8		
PART-35-8-MD	7.0	4.5	3.7	3.0	2.5	2.1		
PART-35-8-HD	10.6	7.1	6.0	5.0	4.2	3.7		
PART-35-10-MD	14.6	10.3	8.6	7.3	6.2	5.4		
PART-39-10-MD	10.9	7.4	6.1	5.0	4.1	3.4		
PART-39-10-HD	15.8	11.1	9.4	7.8	6.6	5.6		

EPAs are Approximate and need to be Confirmed and Certified by
a Registered Professional Engineer
Specifications Subject to Change



PROJECT		SOUTHEAST POLES	
TYPE	QTY		
NOTES		TITLE Round Tapered Aluminum Pole	
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx	
		DATE 4/26/2018	SCALE N.T.S.
		SHEET 2 OF 2	

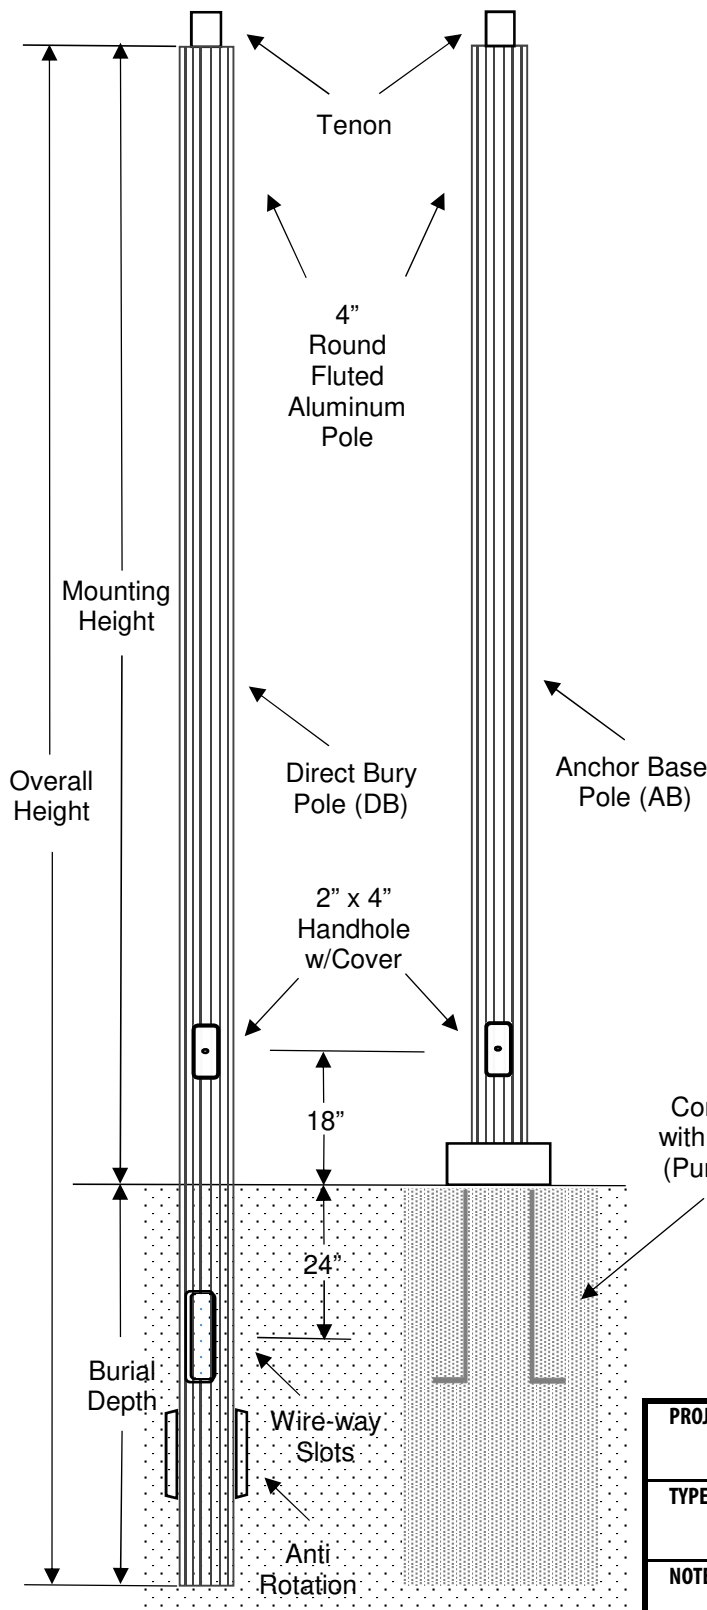


FEATURES

- Anchor Base (AB) or Direct Bury (DB)
- Extruded Aluminum Tube
- Solid Aluminum Base Plate (AB)
- Solid Aluminum Gussets (AB)
- All Parts Circumferentially Welded (AB)
- Black Finish with Optional Colors
- Side or Tenon Mount
- Mounting Heights up to 30 Feet
- Normal Duty .125 Wall
- Medium Duty .188 Wall
- Heavy Duty .250 Wall
- S Strengthening Process Option
- Handhole Access for Wiring
- Pole Base Cover Included
- Optional Bolts (AB)
- Foundation Sold Separately (AB)
- Use CBR-24 Base or Field Cast (AB)

APPLICATIONS

- Parking Areas
- Roadway
- General Area

Concrete Foundation
with Embedded L Bolts
(Purchase Separately)



PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE Round Aluminum Fluted Pole		
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 2

PARF Series

Round Aluminum Fluted Pole

Pole Ordering/Specifying Information

SERIES PARF-DB Direct Bury PARF-AB Anchor Base	Size 4 4"	Length ___ Feet	Color BK Black CC Custom Color	Duty ND Normal MD Medium S Strength Process	Mount _ Drill/Cap T 2.38" Tenon T3 3" Tenon	Options AB Bolts

Pole Specification Table

Pole	Overall Height	Mounting Height	Burial Depth	Size	Wall	Bolt Circle	Base Dia/Thick	Bolts
PARF-DB-4-14-ND	14	8	6	4"	0.125	NA	NA	NA
PARF-DB-4-16-ND	16	10	6	4"	0.125	NA	NA	NA
PARF-DB-4-18-ND	18	12	6	4"	0.125	NA	NA	NA
PARF-DB-4-22-ND	22	14	8	4"	0.125	NA	NA	NA
PARF-DB-4-22-MD	22	14	8	4"	0.188	NA	NA	NA
PARF-DB-4-24-MD	24	16	8	4"	0.188	NA	NA	NA
PARF-AB-4-8-ND	8	8	NA	4"	0.125	6-7"	9.5"/.75"	5/8" X 18"
PARF-AB-4-10-ND	10	10	NA	4"	0.125	6-7"	9.5"/.75"	5/8" X 18"
PARF-AB-4-12-ND	12	12	NA	4"	0.125	6-7"	9.5"/.75"	5/8" X 18"
PARF-AB-4-14-ND	14	14	NA	4"	0.125	6-7"	9.5"/.75"	5/8" X 18"
PARF-AB-4-14-MD	14	14	NA	4"	0.188	6-7"	9.5"/.75"	3/4" X 24"
PARF-AB-4-16-MD	16	16	NA	4"	0.188	6-7"	9.5"/.75"	3/4" X 24"

EPA

Pole	120 MPH	140 MPH	150 MPH	160 MPH	170 MPH	180 MPH		
PARF-DB-4-14-ND	10.3	7.2	6.1	5.3	4.6	4.1	-	-
PARF-DB-4-16-ND	7.2	4.8	4.0	3.4	2.9	2.6	-	-
PARF-DB-4-18-ND	5.1	3.3	2.5	2.1	1.8	1.5	-	-
PARF-DB-4-22-ND	3.6	2.0	1.4	1.1	0.8	0.7	-	-
PARF-DB-4-22-MD	5.1	2.9	2.6	2.0	1.6	1.4	-	-
PARF-DB-4-24-MD	4.0	2.3	2.1	1.6	1.3	1.1	-	-
PARF-AB-4-8-ND	10.8	7.6	6.4	5.5	4.8	4.3	-	-
PARF-AB-4-10-ND	7.6	5.1	4.2	3.5	3.1	2.8	-	-
PARF-AB-4-12-ND	5.4	3.4	2.6	2.2	1.9	1.5	-	-
PARF-AB-4-14-ND	3.7	2.1	1.4	1.1	0.9	0.8	-	-
PARF-AB-4-14-MD	5.6	3.1	2.9	2.2	1.8	1.5	-	-
PARF-AB-4-16-MD	4.4	2.5	2.3	1.7	1.4	1.2	-	-

EPAs are Approximate and need to be Confirmed and Certified by a Registered Professional Engineer
 Strengthening Process can be Modified to Produce Higher EPAs
 Consult Factory
Specifications Subject to Change



24

PROJECT		SOUTHEAST POLES	
TYPE	QTY	TITLE Round Aluminum Fluted Pole	
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx	
APPROVAL		DATE 4/26/2018	SCALE N.T.S.
		SHEET 2 OF 2	

Features


- Aluminum Spinning or Cast Construction
- For Smooth or Fluted 4" OD Poles
- For Direct Bury and some Anchor Base Poles
- Choice of Powder Coat Colors

Ordering/Specifying Information
DB4
Series
Type
1 1 Piece
Slips Over
2 2 -Piece
Wrap Around

Name

Madison
Largo
Philadelphia
Boston
Washington
Standard

Color
BK Black
BZ Bronze
WH White
GN Green
CC Custom
Color

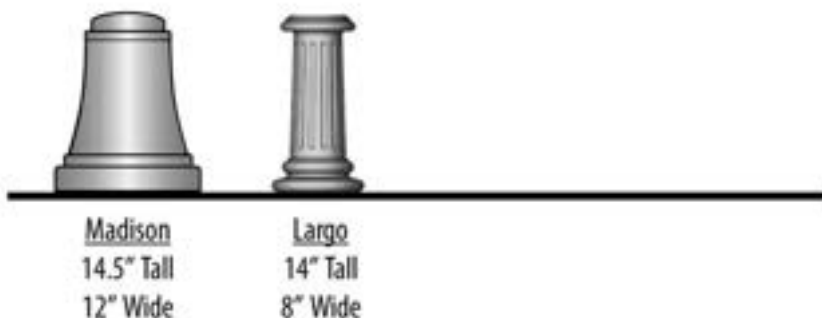
One Piece Bases - Slips Over 4" Poles

Two Piece Wrap Around Bases - Clamshells around 4" Poles

Specifications Subject to Change
25

PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE 4" Decorative Bases		
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

Decorative Arms

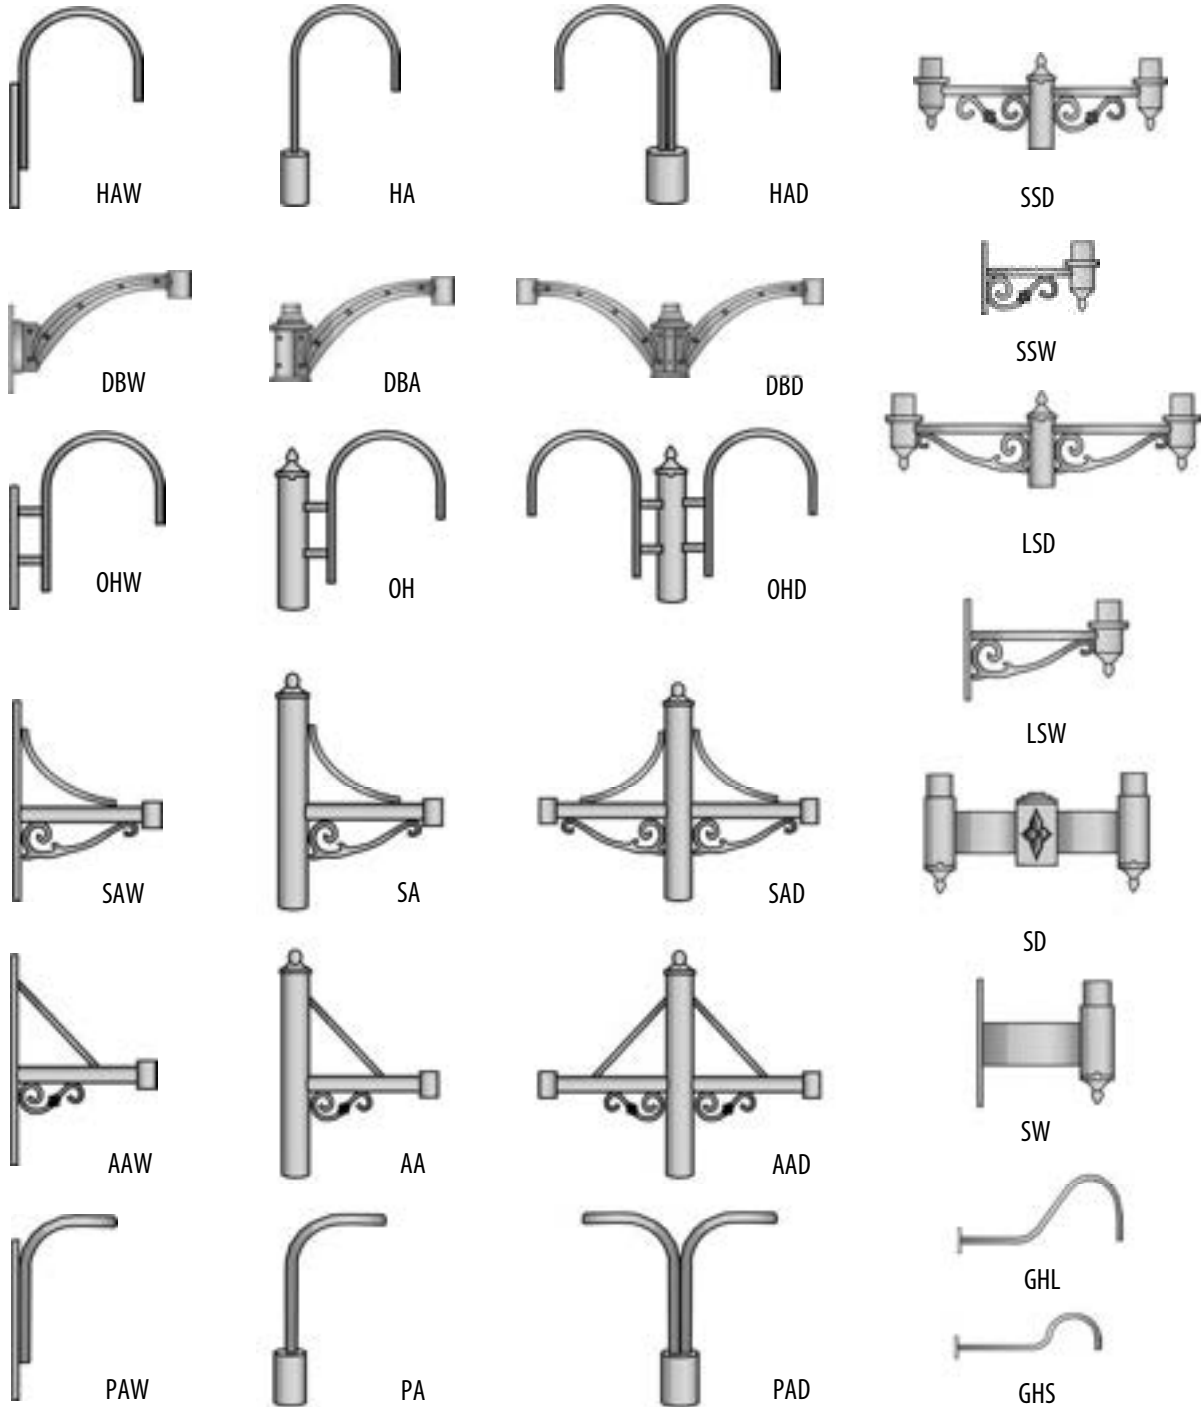Decorative Arms



Customize with Mix and Match Components



Specifications Subject to Change


26

PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE Decorative Arms		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

FP Series

Flagler Series Decorative Pole

Ordering/Specifying Information

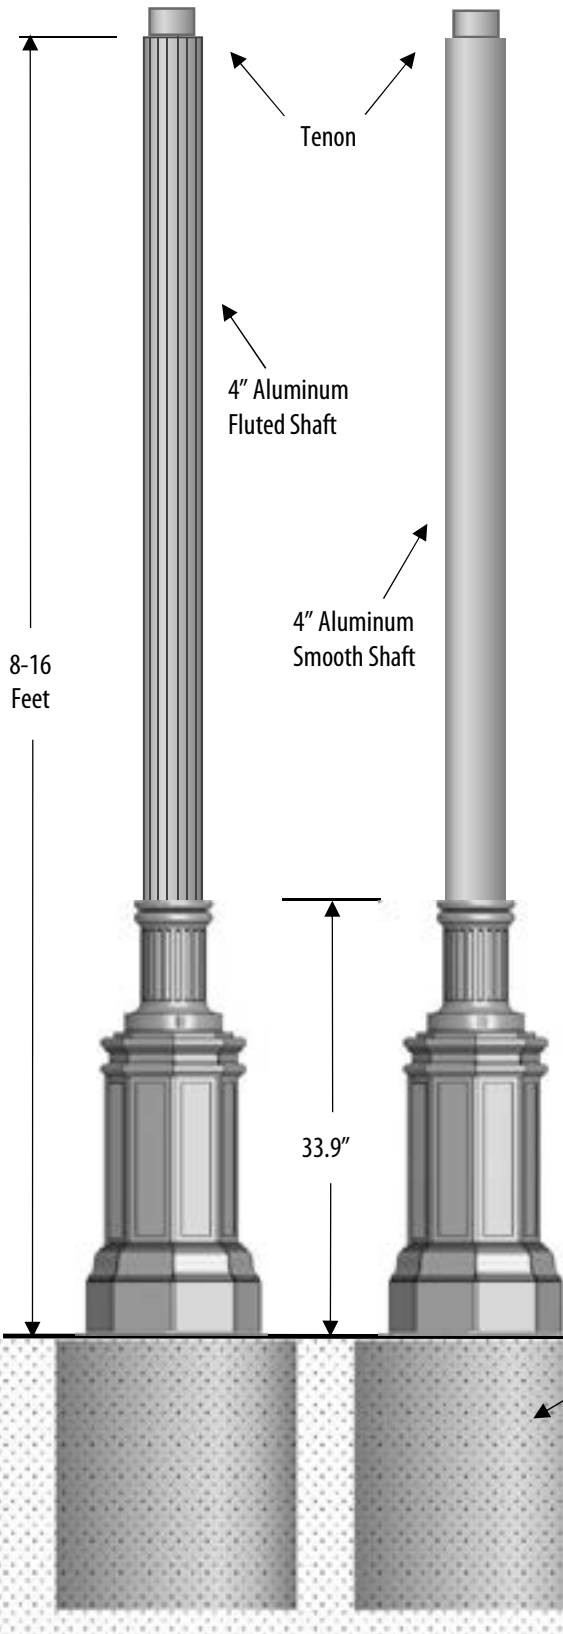

Series	Height	Color	Mounting	Duty
FP4 4" Straight FP4F 4" Fluted	____ Feet	BK Black BZ Bronze WH White CC Custom Color	T3 3" OD Tenon T2 2.38" OD Tenon SM Side Mount with Cap	ND Normal (.125) HD Heavy (.188)
Options				
AB Anchor Bolts				

Features/Specifications

- Classic Historical Look
- Ideal for Commercial Post Top Fixtures
- Structural Decorative Aluminum Cast Base with Access Door
- Circumferently Welded Aluminum Tube with Welded Tenon
- Powder Coat Finish - Choice of Colors
- Used for Roads, Towns, Bridges, Communities and Campuses
- Mounts to a Concrete Base with Embedded L Anchor Bolts

NOTES

- 1) Custom Drills Provided for Side Mount Option
- 2) Octagon Base is 12.75" Wide
- 3) Secure Pole with 4- 5/8" x 18" L Bolts in Concrete Base
- 4) Use 3/4" x 24" Bolts for 14-16 Foot Mounting Heights

Concrete Base with Embedded L Bolts
(Sold Separately) Use CBR-24 Series or Field Cast



Specifications Subject to Change


27

PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE Flagler Series Decorative Pole		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

DP Series

Delray Series Decorative Pole

Ordering/Specifying Information

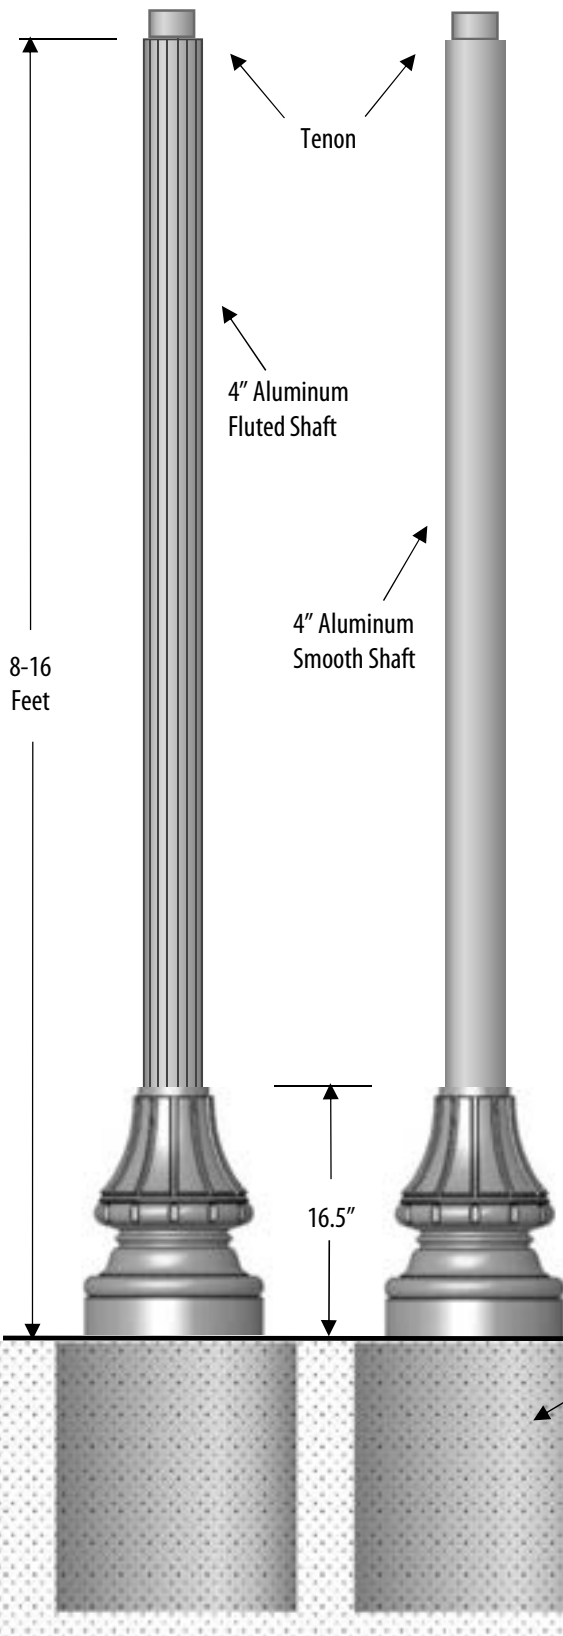

Series	Height	Color	Mounting	Duty
DP4 4" Straight DP4F 4" Fluted	____ Feet	BK Black BZ Bronze WH White CC Custom Color	T3 3" OD Tenon T2 2.38" OD Tenon SM Side Mount with Cap	ND Normal (.125) HD Heavy (.188)
Options				
AB Anchor Bolts				

Features/Specifications

- Classic Historical Look
- Ideal for Commercial Post Top Fixtures
- Structural Decorative Aluminum Cast Base with Access Door
- Circumferently Welded Aluminum Tube with Welded Tenon
- Powder Coat Finish - Choice of Colors
- Used for Roads, Towns, Bridges, Communities and Campuses
- Mounts to a Concrete Base with Embedded L Anchor Bolts

NOTES

- 1) Custom Drills Provided for Side Mount Option
- 2) Base is 13" Wide
- 3) Secure Pole with 4- 5/8" x 18" L Bolts in Concrete Base
- 4) Use 3/4" x 24" Bolts for 14-16 Foot Mounting Heights

Concrete Base with Embedded L Bolts
(Sold Separately) Use CBR-24 Series or Field Cast



Specifications Subject to Change


28

PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE Delray Series Decorative Pole		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

HPP Series

Hyde Park Series Decorative Pole

Ordering/Specifying Information

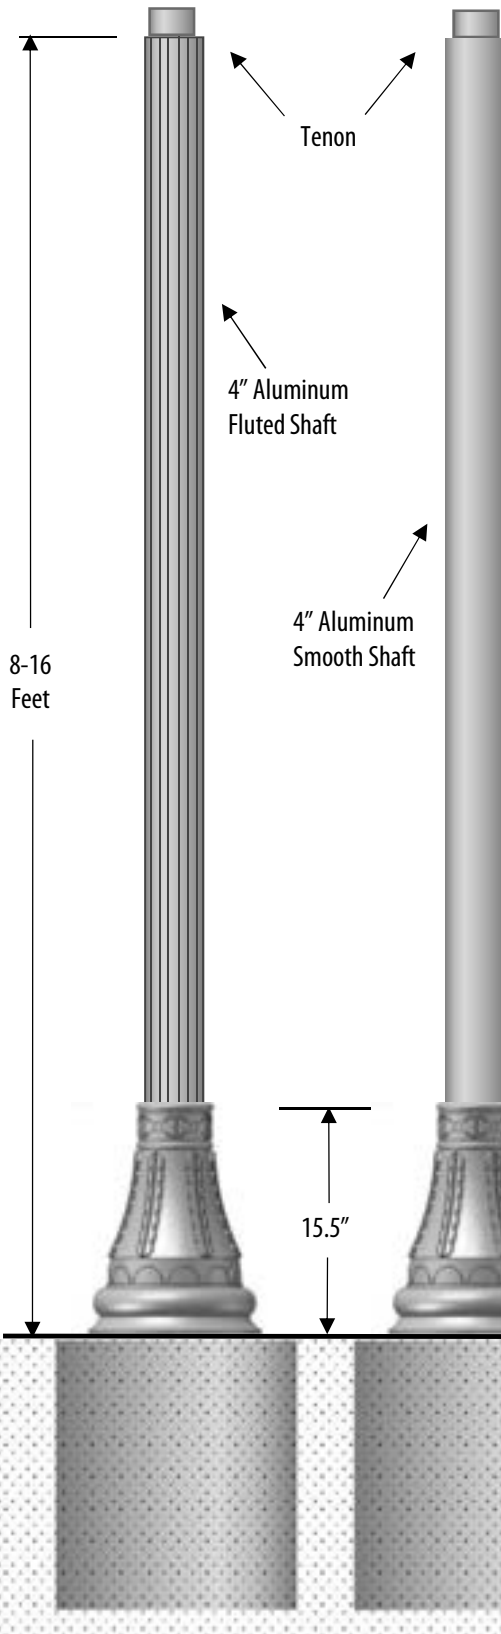

Series	Height	Color	Mounting	Duty
HPP4 4" Straight HPP4F 4" Fluted	____ Feet	BK Black BZ Bronze WH White CC Custom Color	T3 3" OD Tenon T2 2.38" OD Tenon SM Side Mount with Cap	ND Normal (.125) HD Heavy (.188)
				Options
				AB Anchor Bolts

Features/Specifications

- Classic Historical Look
- Ideal for Commercial Post Top Fixtures
- Structural Decorative Aluminum Cast Base with Access Door
- Circumferently Welded Aluminum Tube with Welded Tenon
- Powder Coat Finish - Choice of Colors
- Used for Roads, Towns, Bridges, Communities and Campuses
- Mounts to a Concrete Base with Embedded L Anchor Bolts

NOTES

- 1) Custom Drills Provided for Side Mount Option
- 2) Base is 12.75" Wide
- 3) Secure Pole with 4- 5/8" x 18" L Bolts in Concrete Base
- 4) Use 3/4" x 24" Bolts for 14-16 Foot Mounting Heights

Concrete Base with Embedded L Bolts
(Sold Separately) Use CBR-24 Series or Field Cast



Specifications Subject to Change


29

PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		Hyde Park Series Decorative Pole		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 1

SAP Series

St Augustine Series Decorative Pole

Ordering/Specifying Information

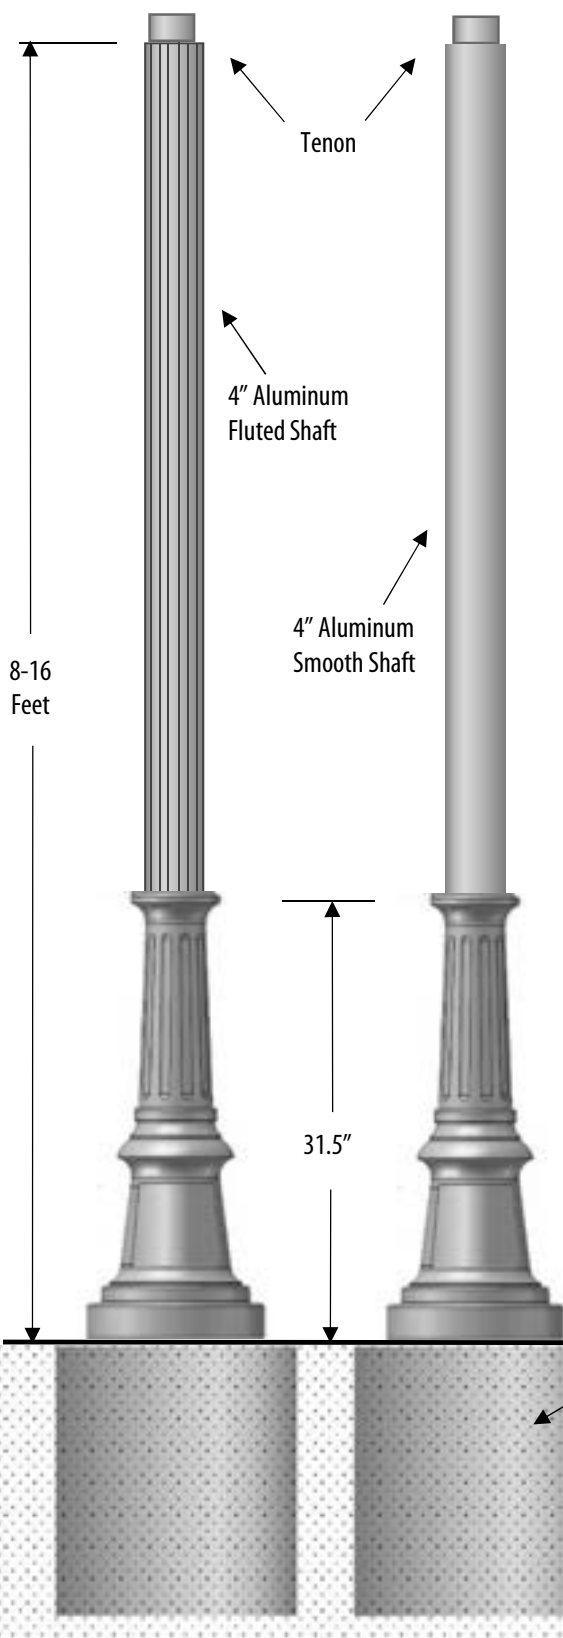

Series SAP4 4" Straight SAP4F 4" Fluted	Height ____ Feet	Color BK Black BZ Bronze WH White CC Custom Color	Mounting T3 3" OD Tenon T2 2.38" OD Tenon SM Side Mount with Cap	Duty ND Normal (.125) HD Heavy (.188)
				Options AB Anchor Bolts

Features/Specifications

- Classic Historical Look
- Ideal for Commercial Post Top Fixtures
- Structural Decorative Aluminum Cast Base with Access Door
- Circumferently Welded Aluminum Tube with Welded Tenon
- Powder Coat Finish - Choice of Colors
- Used for Roads, Towns, Bridges, Communities and Campuses
- Mounts to a Concrete Base with Embedded L Anchor Bolts

NOTES

- 1) Custom Drills Provided for Side Mount Option
- 2) Base is 12" Wide
- 3) Secure Pole with 4- 5/8" x 18" L Bolts in Concrete Base
- 4) Use 3/4" x 24" Bolts for 14-16 Foot Mounting Heights

Concrete Base with Embedded L Bolts
(Sold Separately) Use CBR-24 Series or Field Cast



Specifications Subject to Change


30

PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE St Augustine Series Decorative Pole		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

PAR3 Series

3" Aluminum Round Light Duty Post

Ordering/Specifying Information

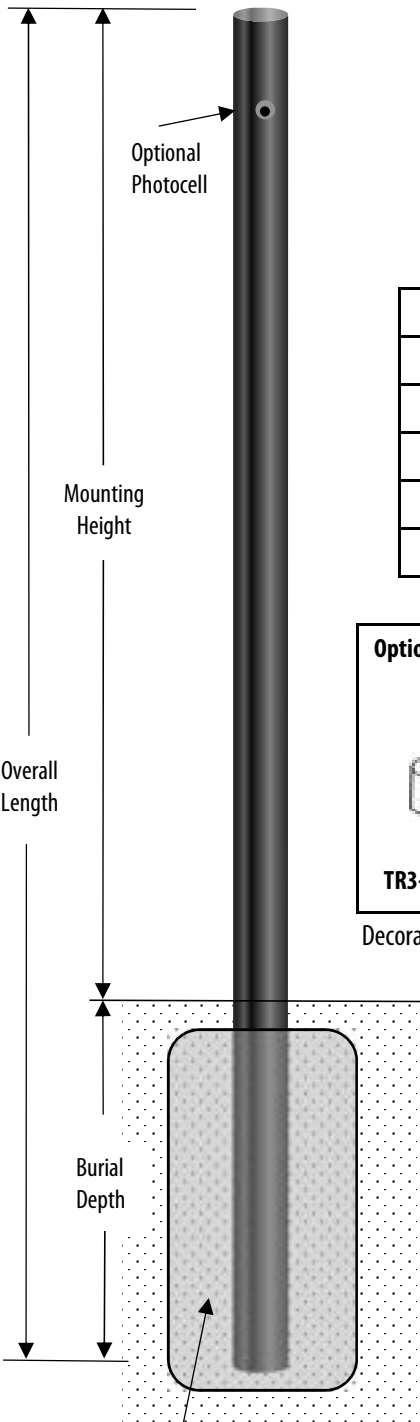

Concrete or Solid Backfill
Required for Stability (By
Others)

PAR3			LD	
Series		Color	Duty	Options
		BK Black WH White CC Custom Color	LD Light	PC 120V Photocell PB3 3" Pole Base TR3-.5 3 to .5" CA Cross Arm-Gold Ends CO Convenience Outlet
	Height ____ Feet			

Pole Specifications		
Length	Mounting	Burial
8'	6'	2'
10'	8'	2'
12'	9'	3'
15'	10'	5'

Features

- Light Duty Residential Post
- For Residential Post Top Fixtures
- Choice of Colors/Options
- Optional Base for Concrete Mount (PB3)
- Direct Bury with Solid Backfill or Collar


Options/Accessories



TR3-.5 1/2 NPT Cap



PB3 3" Pole Base

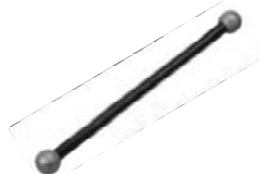

CA Cross Arm



CO Convenience Outlet

Decorative Bases and Other Accessories Available - Consult Factory

NOTES

- 1) 3" OD x .055 Wall - Aluminum
- 2) Direct Bury with Solid Backfill for Stability
- 3) CO/PC Options are Mounted 4.5" from Top of Pole



Specifications Subject to Change


31

PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		3" Aluminum Round Light Duty Post		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 1

PAR3-HD Series

3" Aluminum Round Heavy Duty Post

Ordering/Specifying Information

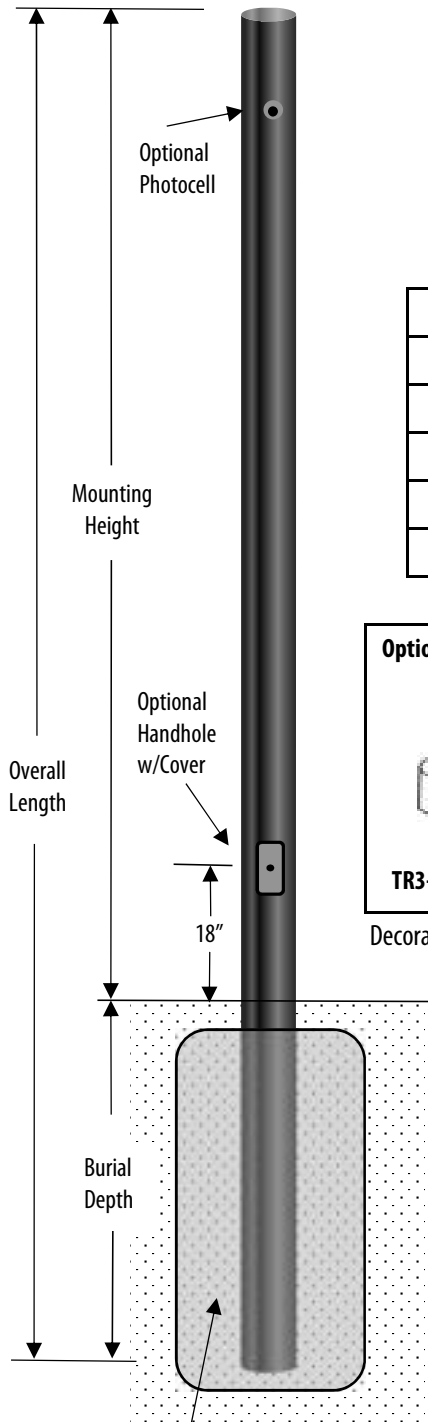

Concrete or Solid Backfill
Required for Stability (By
Others)


			HD	
Series	Height	Color	Duty	Options
PAR3 (Smooth)	____ Feet	BK Black	HD Heavy	HH Hand Hole
PAR3F (Fluted)		BZ Bronze		PC Photocell
PAR3S (Serrated)		CC Custom Color		TR3-.5 3 to .5"
				TR3-2 3 to 2.38" OD
				TR3-.5M 3 to .5" Multi
				CO Convenience Outlet

Pole Specifications		
Length	Mounting	Burial
12'	8'	4'
15'	10'	5'
17'	12'	5'
22'	15'	7'

Features

- Smooth, Fluted (F) or Serrated (S)
- Suitable for Commercial Use
- For 3" Post Top Fixtures/Fitters
- Choice of Powder Coat Colors
- Options for 2.38 OD or 1/2 NPT(s)

Options/Accessories

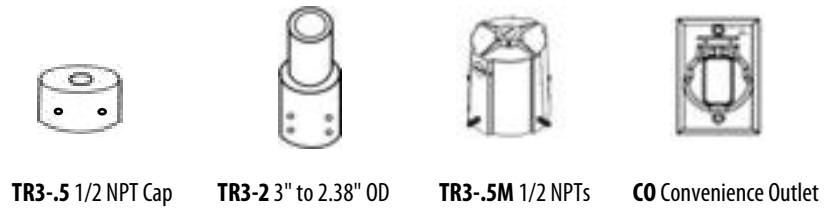

Decorative Bases and Other Accessories Available - Consult Factory

NOTES

- 1) 3" OD x .12 Wall - Aluminum
- 2) Direct Bury with Solid Backfill for Stability
- 3) CO/PC Options are Mounted 4.5" from Top of Pole

Fluted

Serrated



Specifications Subject to Change


32

PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		3" Aluminum Round Heavy Duty Post		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 1

PAR3-AB Series

3" Aluminum Anchor Base Post


Ordering/Specifying Information

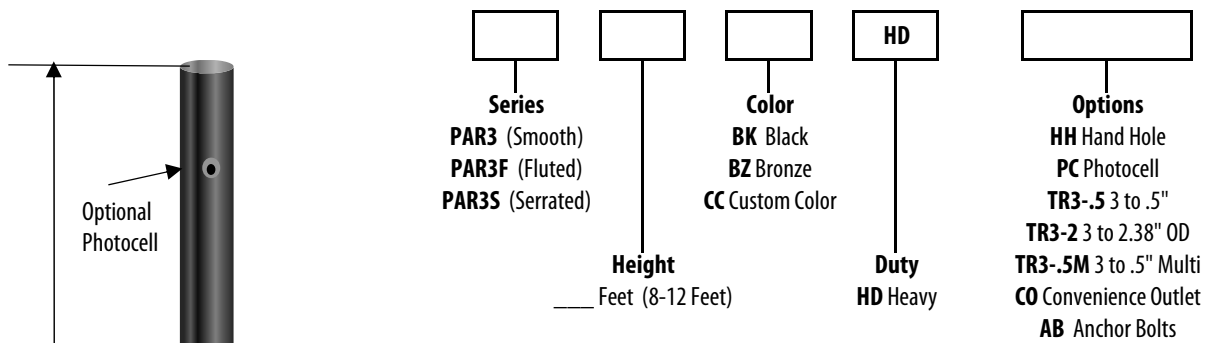

Features/Specifications

- 3" x .12 Wall Aluminum
- Extruded Aluminum Profiles
- 7" Diameter Base - 1/2" Thick
- 5" Bolt Circle with 3 3/4" Holes
- 5/8" x 14" L Bolts, Optional
- Smooth, Fluted (F) or Serrated (S)
- Suitable for Commercial Use
- For 3" Post Top Fixtures/Fitters
- Choice of Powder Coat Colors
- Options for 2.38 OD or 1/2 NPT(s)

Options/Accessories

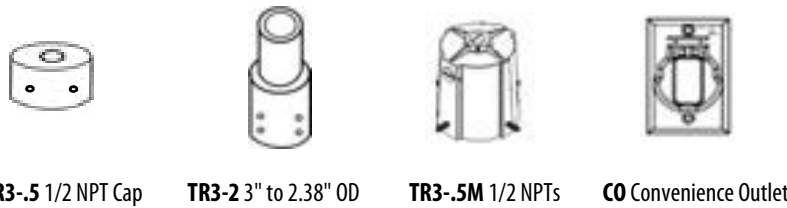


Decorative Bases and Other Accessories Available - Consult Factory

NOTES

- 1) 3" OD x .12 Wall - Aluminum
- 2) Direct Bury with Solid Backfill for Stability
- 3) CO/PC Options are Mounted 4.5" from Top of Pole
- 4) Round Aluminum Base Cover Included
- 4) Order Concrete Base Separately or Field Cast

Concrete Foundation with Embedded L Bolts (Order Separately)



Specifications Subject to Change

33

PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE 3" Aluminum Anchor Base Post		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

Features

- Aluminum Spinning or Cast Construction
- For Smooth, Fluted or Serrated 3" OD Poles
- For Direct Bury and some Anchor Base Poles
- Choice of Powder Coat Colors

Ordering/Specifying Information
DB3
Series
Type

- 1 1 Piece
Slips Over
2 2 -Piece
Wrap Around

Name


Madison
Brooklyn
Key West
Accord
Colonial
Charleston
Largo
Philadelphia
Standard

Color


BK Black
BZ Bronze
WH White
GN Green
CC Custom
Color

**One Piece Bases
Slips Over 3" Poles**

**One Piece Bases
Slips Over 3" Poles**

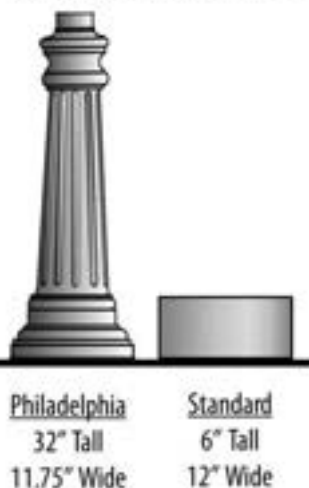**Two Piece Wrap Around Bases
Clamshells around 3" Poles**

Specifications Subject to Change

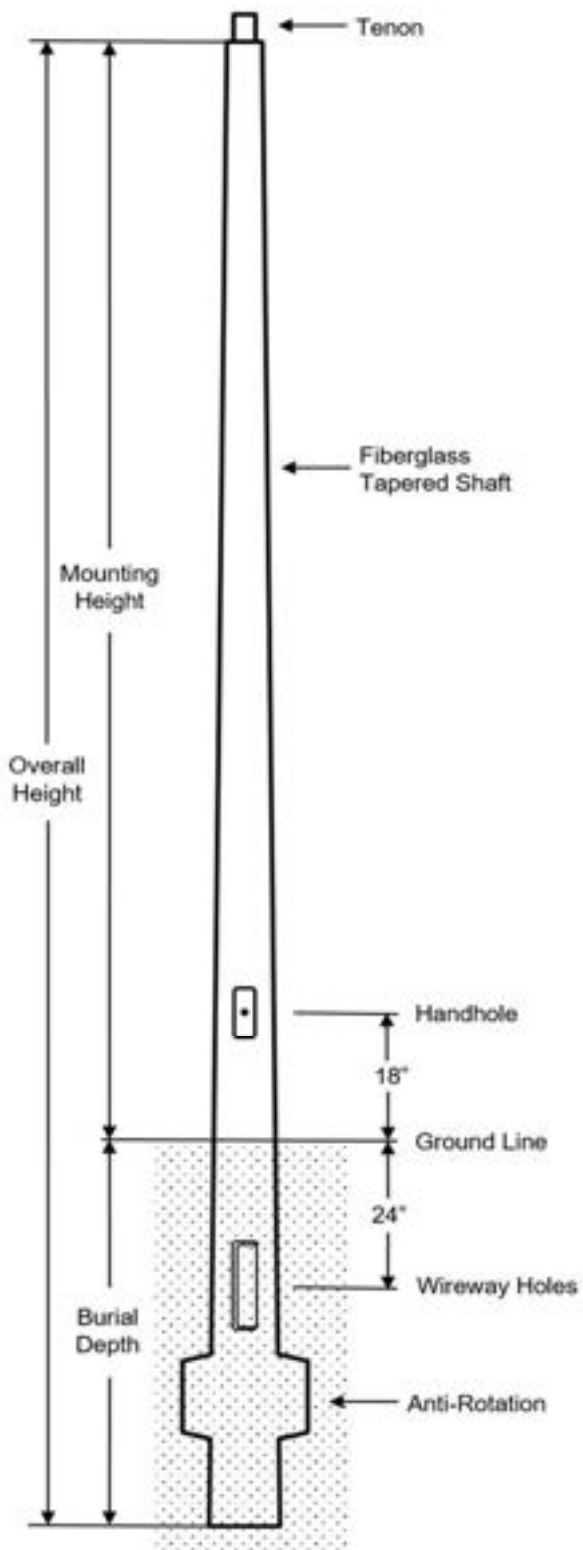PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE 3" Decorative Bases		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1



FEATURES

- Direct Bury Installation
- Tenon Mount
- Smooth Finish
- Choice of Colors
- Handhole Access for Wiring
- Wireway Slots for Conduit Entry

APPLICATIONS

- Parking Lots
- Roadway
- General Area
- Entrance/Walkways



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		Round Tapered Fiberglass Pole		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 2

PFRT Series

Round Tapered Fiberglass Pole

Pole Ordering/Specifying Information

PFRT						
SERIES	Length 15 17 19 22 24 26 32 41	Color BZ Bronze BK Black WH White GY Gray CC Custom Color	Finish S Smooth	Mounting T 2" Tenon T3 3" Tenon	Base _ Direct Bury	Duty ND Normal HD Heavy

Pole Specification Table

Pole	Length	Above Grade	Below Grade	TIP OD	Ground OD	Base OD	Max Fix Weight	Approx Weight
PFRT15	15	10	5	4.1	5.7	9.5	40	31
PFRT17	17	12	5	4.1	5.7	9.5	125	36
PFRT19	19	14	5	4.1	5.94	9.8	85	38
PFRT22	22	16	6	4.1	6.2	10.0	70	49
PFRT24	24	18	6	4.1	6.6	10.4	70	52
PFRT26	26	20	6	4.6	7.2	11.0	85	106
PFRT26-HD	26	20	6	6.4	8.9	12.7	215	142
PFRT32	32	25	7	4.7	8.0	11.75	85	125
PFRT32-HD	32	25	7	6.4	9.8	13.4	110	168
PFRT41-HD	41	30	11	6.6	11.2	15.0	85	263

EPA In Sand

Pole	Ft-lbs @ Grade	Exposure	Risk	Gust Factor	120 MPH	140 MPH	160 MPH	170 MPH
PFRT15	4,635	C	II	1.14	6.0	4.8	3.6	3.0
PFRT17	5,849	C	II	1.14	8.1	6.0	4.5	3.8
PFRT19	6,247	C	II	1.14	6.8	5.0	3.8	3.1
PFRT22	6,599	C	II	1.14	5.5	4.0	3.0	2.4
PFRT24	7,958	C	II	1.14	5.7	4.1	2.9	2.2
PFRT26	9,317	C	II	1.14	6.0	4.3	2.7	2.0
PFRT26-HD	20,962	C	II	1.14	18.3	12.4	8.7	7.2
PFRT32	13,473	C	II	1.14	5.7	4.1	2.5	2.0
PFRT32-HD	22,594	C	II	1.14	13.8	8.9	5.7	4.6
PFRT41-HD	33,079	C	II	1.14	16.2	10.4	6.7	5.3

EPAs are Approximate and Need to be Confirmed and Certified
by a Registered Professional Engineer
Specifications Subject to Change




PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE Round Tapered Fiberglass Pole		
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
		DATE 4/26/2018	SCALE N.T.S.	SHEET 2 OF 2


Ordering/Specifying Information

- Slips Over Existing Tenon
- Allows for Multiple Fixture Mounting
- Choice of Existing Tenons
- Choice of Tenon Lengths
- Choice of Powder Coat Colors
- Tenon Spokes are 2.38" OD


PT				
Series		Slips Over		Color
		2.38" OD		___ Bronze
		3 3"		CC Custom Color
		3.5 3.5"		
		4 4"		
		4.5 4.5"		
	Tenons		Tenon Length	
	1-90 1 @90		___ 4"	
	2-180 2 @180		6 6"	
	2-90 2 @90		8 8"	
	3-120 3 @120		10 10"	
	3-90 3 @90		12 12"	
	4-90 4 @90		18 18"	




PT-1-90




PT-2-180




PT-2-90



PT-3-120



PT-3-90



PT-4-90

NOTES

- 1) Extruded Aluminum Tubing
- 2) Circumferently Welded Tenons
- 3) Removable Plastic Cap for Wiring Access
- 4) Internally Welded Stop
- 5) Internally Welded Bushings for Accurate Fit
- 6) Qty 4 - 3/8" Allen Head Stainless Set Screws for Securing



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		Aluminum Pole Tenon Adapters		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 1



Fixture Arms

Arms are 4" Tall and 2" Wide and Accept 3/8" All Thread; 2" On Center

A6 6" Arm


Mounts to Square Pole or Slip Fitter

A6R 6" Arm Round

Mounts to Round Pole or Slip Fitter

A10 10" Arm

Mounts to Square Pole or Slip Fitter

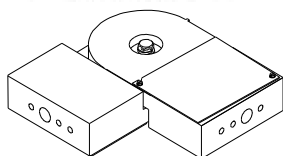

Adjustable Arm

Arm is 4" Tall and 2" Wide and 14" Long and attaches with 3/8" Bolts 2" On center

AA Adjustable Arm

Mounts to Square Pole or Slip Fitter and Swivels allowing for Adjustable Tilt Angles



Round Pole Adapter

RPA Round Pole Adapter Adapter Plate to Mount Square Arms to Round Poles. Specify 3, 4, or 5". Bronze, White, or Custom Color



Slip Fitters

Slip Fitters Slip Over 2.38" OD Tenons and Accept Fixtures/Arms and in Multiple Configurations - Specify

SFSQ Square Steel Slip Fitter

Square Slip Fitter accepts arms 1@90, 2@90, 2@180, 3@90, & 4@90

SFSQ-A Square Aluminum Slip Fitter

Square Slip Fitter accepts arms 1@90, 2@90, 2@180, 3@90, & 4@90

SFRD Round Aluminum Slip Fitter

Round Slip Fitter accepts arms 1@90, 2@90, 2@180, 3@90, 3@120 & 4@90



SFP Slip Fitter Plate (Steel)

Slip Fitter with Flat Plate; with wireway hole and two .38 holes 3.88" on center; for yokes and U-Brackets




SLSF Sports Light Slip Fitter (Steel)

Sports Lighter fixture mounts direct to plate with nibs to lock in pointing direction; or use custom yoke



Bullhorn Arm Mount (BHAM)

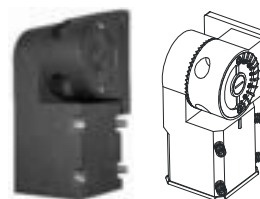

Adjustable Slip Fitters

Adjustable Slip Fitters, Slips Over 2.38" OD Tenons and attaches to Fixtures for Adjustable Tilting

ASF Adjustable Slip Fitter

Attaches to fixtures with 3/8" Bolts; 2" on Center

ASF-HD Heavy Duty Adjustable Slip Fitter

Attaches to fixtures with 3/8" Bolts; 2" on Center; for use with larger/heavier fixtures

Pier Mounts



PMP

PMP Pier Mount Plastic

4.5" Tall for Light Weight Residential fixtures with a 3" Fitter; 4 Mounting Holes; White or Black

PMA

PMA Pier Mount Aluminum

Heavy Duty Pier Mount for Commercial Post Tops with a 3" Fitter; 3 Mounting Holes; Black or Custom Color

DPM

DPM Decorative Pier Mount

Light Duty Cast Aluminum; for Residential and Commercial Fixtures with a 3" Fitter; 4 Mounting Holes; White, Black, or Custom Color

PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE Arms, Slip Fitters and Pier Mounts		
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

Ordering/Specifying Information

- Slips Over Existing Tenon or Pole
- Allows for Multiple Fixture Mounting
- Provides for 2, 3 or 4 - 2.38" OD Tenons
- Choice of Existing Tenons
- Choice of Spacing
- Choice of Powder Coat Colors


BHS				
Series		Slips Over ___ 2.38" OD 3 3" 3.5 3.5"		Color ___ Bronze CC Custom Color

Tenons-Degrees


2 2 @180
3-180 3@180
3-120 3@120
4-90 4@90
4-180 4@180

Spacing


12 12"
18 18"
24 24"
30 30"
36 36"




BHS-2




BHS-3-120

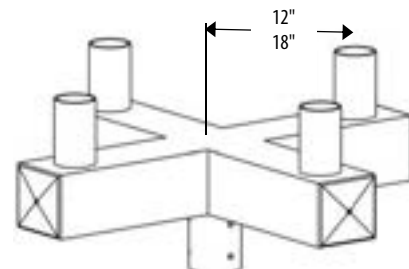

BHS-4-90

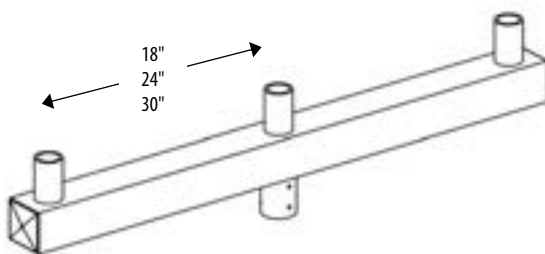

BHS-3-180

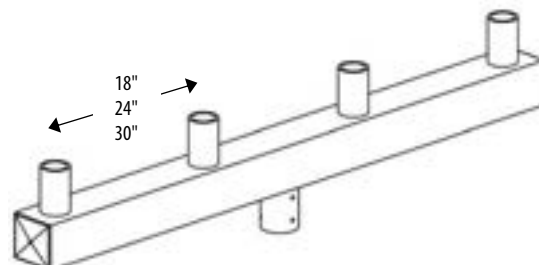

BHS-4-180

NOTES

- 1) 4" Square Extruded Aluminum Tubing
- 2) Circumferently Welded 2.38" OD Tenons
- 3) Removable Plastic Caps for Wiring Access
- 4) Qty 4 - 3/8" Allen Head Stainless Set Screws for Securing



PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE Aluminum Square Bullhorns		
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

BHR Series

Round Steel Bullhorns

- Slips Over Existing Tenon
- Allows for Multiple Fixture Mounting
- Provides for 2, 3 or 4 - 2.38" OD Tenons
- Choice of Colors
- Powder Coat Finish

Ordering/Specifying Information

BHR

Series

Tenons-Deg

2

3-180

3-120

4-180

4-90

(Not Shown)

Slips Over

___ 2.38"

Color


___ Bronze

CC Custom


Color




BHR-2



BHR-3-180



BHR-3-120



BHR-4-180

NOTES

- 1) Steel Tubing
- 2) Circumferentially Welded 2.38" OD Tenons
- 3) Removable Cap for Wiring Access
- 4) Stainless Set Hex Heads for Securing



40

PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE Round Steel Bullhorns		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

TR-TE-PA Series


Tenon Reducers-Expanders-Pole Adapters

Ordering/Specifying Information


- Reducers Slip Over Pole/Tenon (TR)
- Expanders Slip Over Pole/Tenon (TE)
- Pole Adaptors Slip Into Pole (PA)
- Round or Square-Size Configurations
- Choice of Colors
- Powder Coat Finish

Series	Type	Size	New Tenon	Color
TR	S Square	1.5 1 7/8 OD	.5 1/2" NPT	_ Bronze
TE	R Round	2 2.38" OD	.5M 1/2" NPTs	CC Custom Color
PA		3 3" OD	2 2.38" OD	
		3.5 3.5" OD	3 3" OD	
		4 4" OD/SQ	3.5 3.5" OD	
		4.5 4.5" OD	4 4" OD	
		5 5" OD/SQ		
		6 6" OD/SQ		

Slip Over Tenon Reducers (TR)




TR-R3-2 (PT1)
TR-R3.5-2
TR-R4-2
TR-R4-3
TR-R4.5-2
TR-R4.5-3
TR-R5-2
TR-R5-3



TR-R2-.5
TR-R3-.5




TR-R3-.5M




TR-S4-2
TR-S4-3
TR-S5-2
TR-S5-3
TR-S6-2
TR-S6-3

Slip In Pole Adapters (PA)




PA-S4-2
PA-S4-3
PA-S5-2
PA-S5-3
PA-S6-2
PA-S6-3



PA-R3-2
PA-R4-2
PA-R4-3
PA-R4.5-2
PA-R4.5-3
PA-R5-2
PA-R5-3
PA-R6-2
PA-R6-3

Slip Over Tenon Expanders (TE)



TE-R1.5-2
TE-R2-3
TE-R2-4
TE-R3-4

NOTES

- 1) Welded Aluminum Construction
- 2) Circumferentially Welded Tenons
- 3) Stainless Hardware Included



PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE Tenon Reducers-Expanders-Pole Adapters		
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

Ordering/Specifying Information

- Reducers Slip Over Pole/Tenon (TR)
- Pole Adaptors Slip Into Pole (PA)
- Round or Square Size Configurations
- Choice of Colors
- Powder Coat Finish



Series
TR-S
PA-S



Type
S Square
R Round



Size
3 3" OD
4 4" OD/SQ
5 5" OD/SQ



New Tenon
2 2.38" OD



Color
_ Bronze
CC Custom Color

Slip Over Tenon Reducers (TR)


TR-S-R3-2
TR-S-R4-2
TR-S-R5-2

Slip In Pole Adapters (PA)



PA-S-S4-2
PA-S-S5-2

NOTES


- 1) Welded Steel Construction
- 2) Circumferently Welded 2.38" OD Tenons
- 3) Stainless Hardware Included




PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE Steel Tenon Reducers-Pole Adapters		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

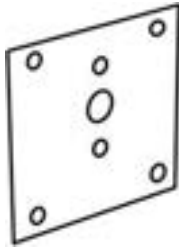


WMP Wall Mount Plate (Steel)
Use for mounting fixtures with Arms to Recessed Box. Bronze; Optional Custom Colors.




WMA Wall Mount Arm (Steel)
Use for mounting fixtures with Arms to Wall. Bronze; Optional Custom Colors.




WMT Wall Mount Tenon (Steel)
Use for mounting fixtures with Slip Fitter to Wall. Tenon is 2.38" OD x 4". Bronze; Optional Custom Colors.




WML Wall Mount L Bracket (Steel)
Use for mounting fixtures with Slip Fitter to Wall. Tenon is 2.38" OD; Offsets off wall for side to side adjustability. Bronze; Optional Custom Colors.

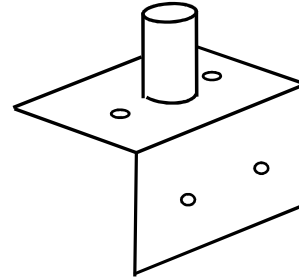

WMPP Wall Mount Parapet (Aluminum)
Mounts to building Parapet; 2.38" OD x 4" Tenon. Bronze; Optional Custom Colors.

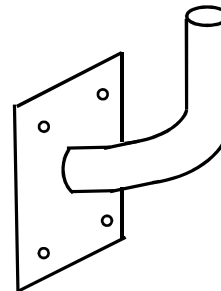


WMS Wall Mount Sweep (Steel)
Use for mounting fixtures with Slip Fitter to Wall. Tenon is 2.38" OD; Offsets off wall for side to side adjustability. Bronze; Optional Custom Colors

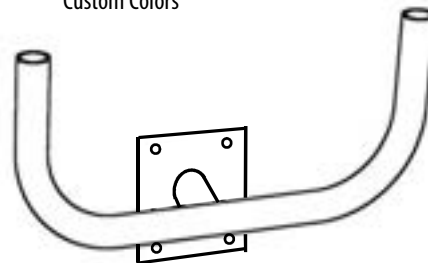


WMBH Wall Mount Bullhorn (Aluminum)
Allows for Multiple fixtures to be offset from wall (2.38" OD Pipe). Bronze; Optional Custom Colors.

PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		Wall Mount Brackets		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 1

U Brackets



UBS Small 2 Piece Swivel U-Bracket
Designed to hold fixtures up to 400 Watt HID; uses standard hole patterns to mount to fixture; Bronze Steel




UBL Large 2 Piece Swivel U-Bracket
Designed for heavier duty applications and to hold fixtures up to 1000W HID; uses standard hole patterns to mount to fixture; Bronze Steel




UB Small U-Bracket
Designed to fit specific fixtures for tilting applications; Bronze Steel


Yokes



ALY Area Light Yoke
Bronze Steel Yoke for 16" Square Area ALL Series Light Fixture.



SLY Sports Lighter Yoke
Available in Aluminum or Steel; specifically designed for SL Series Sports Lighter

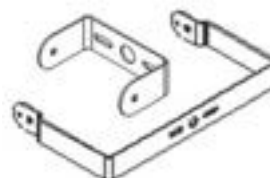

CUY Custom Aluminum U Bracket or Yoke
Specify size , bends and hole patterns for custom applications.



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		U-Brackets and Yokes		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 1

Plastic Pole Caps



PCAP-S* Square Pole Cap
Square Caps come in 4, 5 and 6". Steel Tension clips hold cap in place. Black; Optional Colors.




PCAP-R* Round Pole Cap
Round Caps come in 3, 3.5, 4, 4.5, 5 and 6". Steel Tension clips hold cap in place. Black; Optional Colors.

Pole Base Covers



PBC-S* Pole Base Cover Square
2 Piece Aluminum Construction for 4, 5 and 6" Square Poles. Specify Pole Size, Desired Width, and Depth. Standard Bronze, Optional Colors.

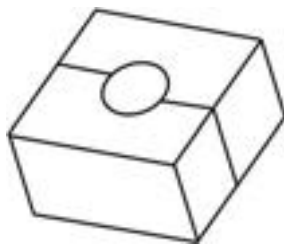

PBC-SR* Pole Base Cover Square-Round
2 Piece Aluminum Construction for 4, 4.5, 5 and 6" Round Poles. Specify Pole Size, Desired Width, and Depth. Standard Bronze, Optional Colors.



PBC-RR* Pole Base Cover Round-Round
2 Piece Aluminum Construction for 3, 4, 4.5, 5 and 6" Round Poles. Specify Pole Size, Desired Width, and Depth. Standard Bronze, Optional Colors.

PBC-S-S4 Pole Base Cover 4" Square
2 Piece Steel Construction. 10.75" x 10.75" x 5" Deep; Bronze, Optional Colors.

PBC-S-S5 Pole Base Cover 5" Square
2 Piece Steel Construction. 11.25" x 11.25" x 5" Deep; Bronze, Optional Colors.



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		Pole Caps and Pole Base Covers		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 1


Ordering/Specifying Information

- Slips Over Existing Tenon
- Allows for Multiple Fixture Mounting
- Steel Construction
- Choice of Tenon Lengths
- Choice of Powder Coat Colors


PTS				
Series		Slips Over ___ 2.38" OD		Color ___ Bronze CC Custom Color
Tenons		Tenon Length		
1-90 1 @90		6 6"		
2-180 2 @180		8 8"		
2-90 2 @90		10 10"		
3-120 3 @120		12 12"		
3-90 3 @90		18 18"		
4-90 4 @90		24 24"		




PTS-1-90

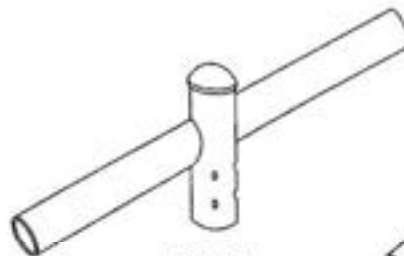


PTS-2-180

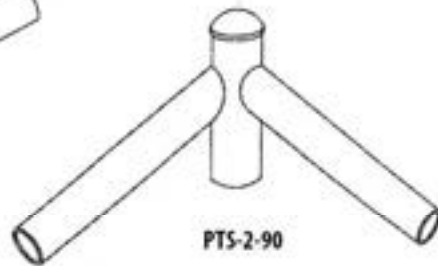


PTS-2-90

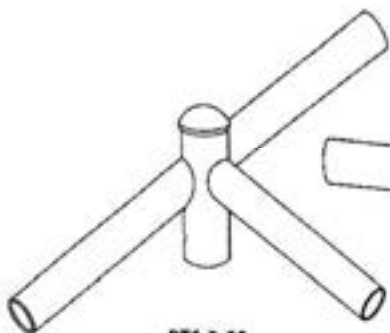

PTS-3-90

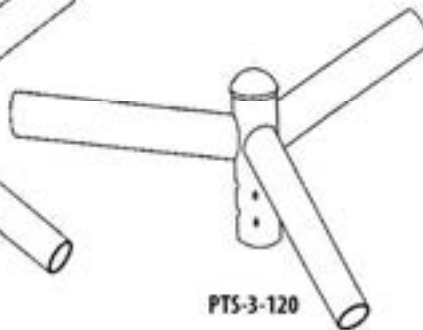

PTS-3-120

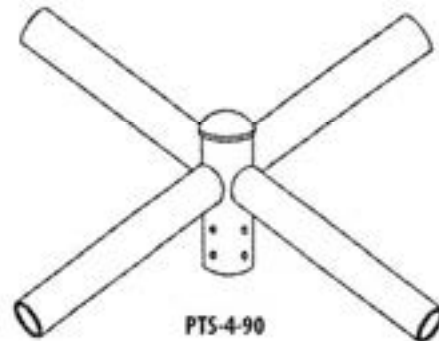

PTS-4-90

Notes

- 1) Steel Construction
- 2) Circumferentially Welded 2.38" OD Tenons
- 3) Removable Center Cap for Wiring Access
- 4) Qty 4 - Hex Head Stainless Set Screws for Securing










PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE Steel Pole Tenon Adapters		
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

Ordering/Specifying Information

- 2" (2.38" OD) Aluminum Pipe
- Square Series Wrap Pole Edge
- Round Series Mount Flat to Surface
- U Series Mount Offset from Surface
- F Series Mount Flat to any Flat Surface
- Custom Bolt Patterns and Sizes
- Hardware Sold Separately
- Bronze Powder Coat Finish

PMA				
Series	Mount	Arm/Spacing	Color	Options
	4S 4" Square	T* 4-12" Arm	BZ Bronze	TK Top Keyhole
	5S 5" Square	TT* 6-12" Arm	CC Custom Color	BK Bottom Keyhole
	6S 6" Square	L8 8" Spacing		TS Top Slot
	3R 3" Round	L12 12" Spacing		BS Bottom Slot
	4R 4" Round	S12 12" Spacing		CD Custom Drill
	4.5R 4.5" Round	S18 18" Spacing		
	5R 5" Round			
	6R 6" Round			
	U Universal			
	F Flat			

 ST- Tenon PMA4ST* PMA5ST* PMA6ST*	 RT- Tenon PMA3RT* PMA4RT* PMA4.5RT* PMA5RT* PMA6RT*	 UT- Tenon PMAUT*	 FT- Tenon PMAFT*-S
 STT- Tilted Tenon PMA4STT* PMA5STT* PMA6STT*	 RTT- Tilted Tenon PMA3RTT* PMA4RTT* PMA4.5RTT* PMA5RTT* PMA6RTT*	 UTT- Tilted Tenon PMAUTT*	 FTT- Tilted Tenon PMAFTT*-S
 SL-90 Degree L PMA4SL* PMA5SL* PMA6SL*	 RL-90 Degree L PMA3RL* PMA4RL* PMA4.5RL* PMA5RL* PMA6RL*	 UL-90 Degree L PMAUL*	 FL-90 Degree L PMAFL*-S
 SS- Sweep PMA4SS* PMA5SS* PMA6SS*	 RS- Sweep PMA3RS* PMA4RS* PMA4.5RS* PMA5RS* PMA6RS*	 US- Sweep PMAUS*	 FS- Sweep PMAFS*-S

NOTES

- 1) Welded Aluminum Construction
- 2) Pipe Circumferently Welded on Mounts
- 3) Custom Drills, Slot, and Keyholes
- 4) U Bracket mounts to Wood, Concrete, & Metal Poles
- 5) F Series shown with Bottom Slot (BS) Option



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		Aluminum Pole Mounts		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 1

Ordering/Specifying Information

- Allows for 90 Degree Turn from Pole
- Sweep or L Bracket Options
- Square Series Wrap Pole Edge
- Round Series Mount Flat to Surface
- U Series Mount Offset from Surface
- F Series Mount Flat to any Flat Surface
- Custom Bolt Patterns and Sizes
- Hardware Sold Separately
- 2" (2.38" OD) Aluminum Pipe
- Bronze Powder Coat Finish

CPM
Series

Mount

4S 4" Square
5S 5" Square
6S 6" Square
3R 3" Round
4R 4" Round
4.5R 4.5" Round
5R 5" Round
6R 6" Round
U Universal
F Flat

Arm/Spacing

L8 8" Spacing
L12 12" Spacing
S12 12" Spacing
S18 18" Spacing






Color


BZ Bronze
CC Custom Color

Options

TK Top Keyhole
BK Bottom Keyhole
TS Top Slot
BS Bottom Slot
CD Custom Drill

Round L

Flat L

Universal L

Square L

Round Sweep

Flat Sweep

Universal Sweep

Square Sweep

NOTES


- 1) Welded Aluminum Construction
- 2) Pipe Circumferently Welded on Mounts
- 3) Custom Drills, Slots and Keyholes
- 4) U Bracket mounts to Wood, Concrete & Metal Poles
- 5) F Series shown with Bottom Slot (BS) Option



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE Charging Aluminum Pole Mounts		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

Ordering/Specifying Information

- Slips Into Pole
- Allows for Multiple Fixture Mounting
- Steel Construction
- 4" x 2.38" OD Tenons
- Optional Colors

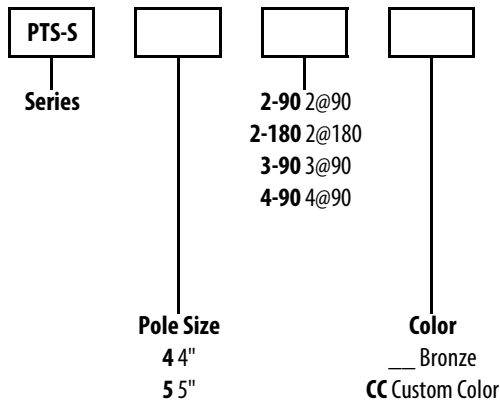

**PTS-S4-2-90
PTS-S5-2-90**



**PTS-S4-2-180
PTS-S5-2-180**



**PTS-S4-3-90
PTS-S5-3-90**



**PTS-S4-4-90
PTS-S5-4-90**

Notes


- 1) Steel Construction
- 2) Circumferently Welded 2.38" OD Tenons
- 3) Removable Center Cap for Wiring Access
- 4) Qty 4 - Hex Head Stainless Set Screws for Securing



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE Steel Square Pole Tenon Adapters		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

Ordering/Specifying Information

- Slips Into 4" or 5" Poles
- Allows for Multiple Fixture Mounting
- Steel Construction
- 2.38" OD Tenons
- Bronze Powder Coat Finish
- Optional Colors

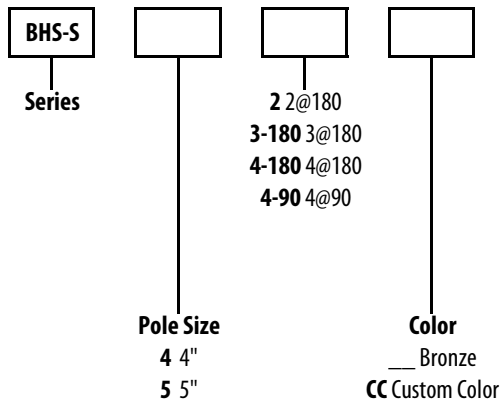

BHS-S4-2
BHS-S5-2



BHS-S4-3-180
BHS-S5-3-180



BHS-S4-4-180
BHS-S5-4-180



BHS-S4-4-90
BHS-S5-4-90

Notes

- 1) Steel Construction
- 2) Circumferently Welded 2.38" OD Tenons
- 3) Removable End Caps for Wiring Access
- 4) Qty 4 - Hex Head Stainless Set Screws for Securing




PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		Square Steel Bullhorns		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 1


Ordering/Specifying Information

- Slips Over Existing Tenon
- Allows for Multiple Fixture Mounting
- Provides for 2, 3 or 4 - 2.38" OD Tenons
- Choice of Existing Tenons
- Choice of Spacing
- Optional Powder Coat Colors


PTT				
Series		Slips Over		Color
		2.38" OD		___ Bronze
		3 3"		CC Custom Color
		3.5 3.5"		
		4 4"		
		4.5 4.5"		
	Tenons		Tenon Length	
	1-90 1 @90		4"	
	2-180 2 @180		6 6"	
	2-90 2 @90		8 8"	
	3-120 3 @120		10 10"	
	3-90 3 @90		12 12"	
	4-90 4 @90		18 18"	




PTT-1-90




PTT-2-180




PTT-2-90



PTT-3-120

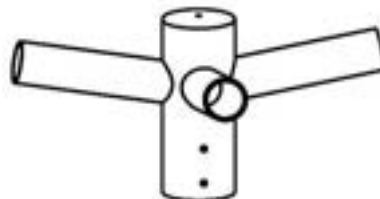

PTT-3-90

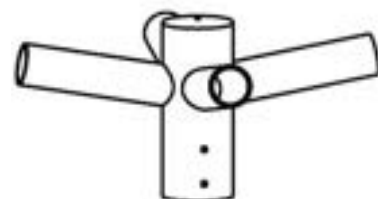

PTT-4-90

NOTES




- 1) Extruded Aluminum Tubing
- 2) Circumferently Welded 2.38" OD Tenons
- 3) Removable Plastic Cap for Wiring Access
- 4) Internally Welded Stop
- 5) Internally Welded Bushings for Accurate Fit
- 6) Qty 4 - 3/8" Allen Head Stainless Set Screws for Securing




PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE		
APPROVAL		10 Degree Tilted Pole Tenon Adapters		
		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 1

Ordering/Specifying Information

- Slips Over Existing Tenon
- Allows for Multiple Fixture Mounting
- Choice of Existing Tenons
- Choice of Tilt Angle
- Bronze Powder Coat Finish
- Optional Colors

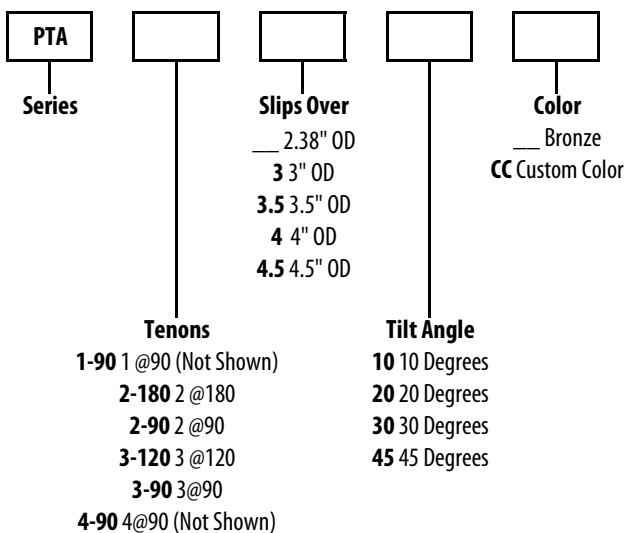
PTA-2-180

PTA-2-90


PTA-3-120

PTA-3-90
NOTES

- 1) Extruded Aluminum Tubing
- 2) Circumferently Welded 2.38" OD Tenons
- 3) Removable Plastic Cap for Wiring Access
- 4) Qty 4 - 3/8" Allen Head Stainless Set Screws for Securing



PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE Aluminum Pole Tenon Angled Adapters		
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

Economy Post Tops




EPT-1-90 Economy Post Tops are Suitable for Light Duty Applications. Specify Existing Tenon Size 2.38", 3", or 3.5". Length of 2.38" OD Tenon: 4"-6" or 8". Bronze Aluminum with Optional Colors. 4 - 3/8" Stainless Set Screws provided to Secure to Post or Tenon.



EPT-2-180 Economy Post Tops are Suitable for Light Duty Applications. Specify Existing Tenon Size 2.38", 3", or 3.5". Length of 2.38" OD Tenon: 4"-6" or 8". Bronze Aluminum with Optional Colors. 4 - 3/8" Stainless Set Screws provided to Secure to Post or Tenon.

Adjustable Tenons



AT Adjustable Tenon
Fabricated Welded Construction. Provides Side to Side and Up/Down Adjustability. Specify Existing Tenon Size 2.38", 3", or 3.5". Length of 2.38" OD Tenon: 4"-6" or 8". Bronze Aluminum with Optional Colors. 4 - 3/8" Stainless Set Screws provided to Secure to Post or Tenon.



AT-C Cast Adjustable Tenon
Slips over 2.38" Tenon providing Side to Side and Up/Down Adjustability. Bronze Color; Optional Custom Colors. Stainless Set Screws provided to Secure Post or Tenon.




PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		Economy Post Tops and Adjustable Tenons		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 1


Ordering/Specifying Information

- Slips Over Existing Tenon
- Allows for Multiple Fixture Mounting
- Choice of Existing Tenons
- Choice of Spacing
- Bronze Powder Coat Finish
- Optional Colors
- End Tenons @45-90 or 135 Degrees
- Up/Down 90 Deg Vertical to Horizontal
- Middle Tenons Fixed at 180 Degrees


BHSAT					
Series		Slips Over ___ 2.38" OD 3 3" 3.5 3.5"		Color ___ Bronze CC Custom Color	
	Tenons-Degrees 2 2@180 3 3@180 4 4@180		Spacing "A" 18 18" 24 24" 30 30" 36 36"		End Tenons 45 45 Degrees 90 90 Degrees 135 135 Degrees ___ In Line



BHSAT-2

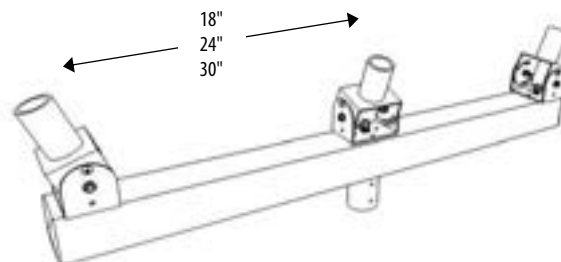

BHSAT-3

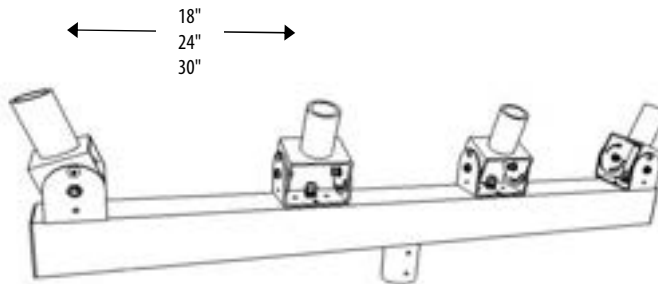

BHSAT-4

NOTES

- 1) Extruded Aluminum Tubing
- 2) Circumferently Welded 2.38" OD Tenons
- 3) Removable Plastic End Caps for Wiring Access
- 4) Internally Welded Stop
- 5) Qty 4 - 3/8" Allen Head Stainless Set Screws for Securing
- 6) Internally Welded Bushings for Accurate Fit




PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE Square Adjustable Tenon Bullhorns		
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1


Ordering/Specifying Information

- Slips Over Existing Tenon
- Allows for Multiple Fixture Mounting
- Choice of Existing Tenons
- Choice of Arm Lengths
- Bronze Powder Coat Finish
- Optional Colors


BHR-A				
Series		Slips Over		Color
		2.38" OD		___ Bronze
		3 3"		CC Custom Color
		3.5 3.5"		
		4 4"		
		4.5 4.5"		
Tenons-Degrees		Spacing		
2 2@180		12 12"		
3-180 3@180		18 18"		
3-120 3@120		24 24"		
4-90 4@90		30 30"		
4-180 4@180		36 36"		




BHR-A-2




BHR-A-3-180



BHR-A-3-120



BHR-A-4-90

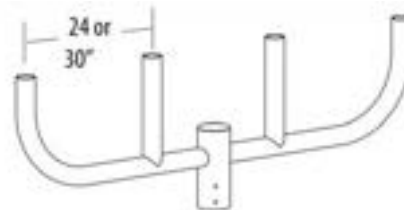

BHR-A-4-180

NOTES

- 1) Extruded Aluminum Tubing
- 2) Circumferently Welded 2.38" OD Arms/Tenons
- 3) Removable Plastic Cap for Wiring Access
- 4) Internally Welded Stop
- 5) Internally Welded Bushings for Accurate Fit
- 6) Qty 4 - 3/8" Allen Head Stainless Set Screws for Securing






PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		Round Aluminum Bullhorns		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 1

Ordering/Specifying Information

- Slips Over Existing Tenon
- Allows for Multiple Fixture Mounting
- Choice of Existing Tenons
- Choice of Spacing
- Bronze Powder Coat Finish
- Optional Colors

CBHR				
Series		Slips Over 2.38" OD 3 3" 3.5 3.5"		Color Bronze CC Custom Color
	Tenons-Degrees 2 2@180 3 3@180 4 4@180		Spacing 18 18" 24 24" 30 30" 36 36"	

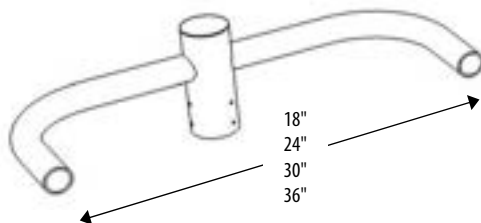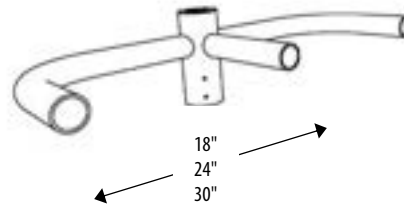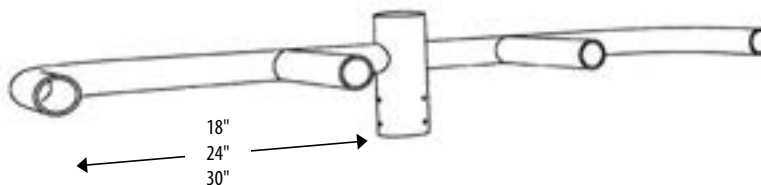
CBHR-2

CBHR-3

CBHR-4
NOTES

- 1) Extruded Aluminum Tubing
- 2) Circumferently Welded 2.38" OD Tenons
- 3) Removable Plastic Cap for Wiring Access
- 4) Internally Welded Stop
- 5) Qty 4 - 3/8" Allen Head Stainless Set Screws for Securing
- 6) Internally Welded Bushings for Accurate Fit




PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE Aluminum Round Charging Bullhorns		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1


Ordering/Specifying Information

- Slips Over Existing Tenon
- Allows for Multiple Fixture Mounting
- Choice of Existing Tenons
- Choice of Spacing
- Bronze Powder Coat Finish
- Optional Colors


BHRR				
Series		Slips Over		Color
		2.38" OD		___ Bronze
		3 3"		CC Custom Color
		3.5 3.5"		
		4 4"		
	Tenons-Degrees		Spacing "A"	
	2 2@180		12 12"	
	3 3@180		18 18"	
	4 4@180		24 24"	
			30 30"	

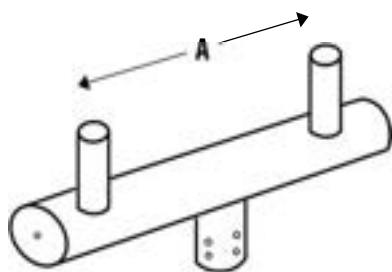

BHRR-2

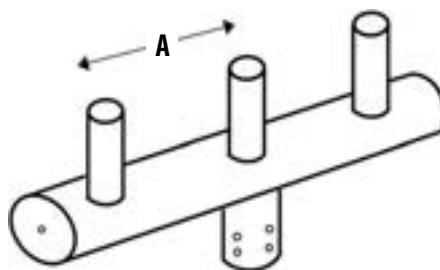

BHRR-3

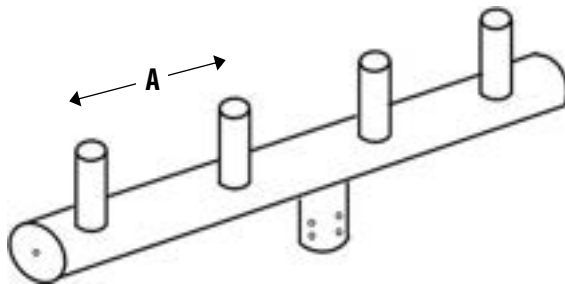

BHRR-4

NOTES

- 1) Extruded Aluminum Tubing
- 2) Circumferently Welded 2.38" OD x 4" Tenons
- 3) Removable Plastic End Caps for Wiring Access
- 4) Internally Welded Stop
- 5) Qty 4 - 3/8" Allen Head Stainless Set Screws for Securing
- 6) Internally Welded Bushings for Accurate Fit







PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE Aluminum Round-Round Bullhorns		
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

Ordering/Specifying Information

- Slips Over Existing Tenon
- Allows for Multiple Fixture Mounting
- Choice of Existing Tenons
- Choice of Spacing
- Choice of Tenon Arm Lengths
- Bronze Powder Coat Finish
- Optional Colors

CBHRR					
Series		Slips Over		Tenon Length	
		2.38" OD		4"	
		3 3"		6 6"	
		3.5 3.5"		8 8"	
		4 4"			
	Tenons-Degrees		Spacing "A"		Color
	2 2@180		12 12"		___ Bronze
	3 3@180		18 18"		CC Custom Color
	4 4@180		24 24"		
	4D DbI-2@180		30 30"		

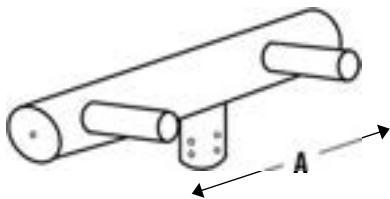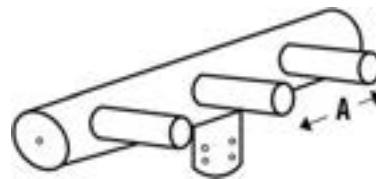
CBHRR-2

CBHRR-3

CBHRR-4

CBHRR-4D
NOTES

- 1) Extruded Aluminum Tubing
- 2) Circumferently Welded 2.38" OD Tenons
- 3) Removable Plastic End Caps for Wiring Access
- 4) Internally Welded Stop
- 5) Qty 4 - 3/8" Allen Head Stainless Set Screws for Securing



PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE Aluminum Charging Round Bullhorns		
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

SL-A Series

Aluminum Sports Lighter Brackets

Ordering/Specifying Information

- Aluminum Angle Welded Construction
- Allows for Multiple Fixture Mounting
- Choice of Mounting Options
- Choice of Spacing
- Raw Aluminum or Powder Coat Finish
- Optional Custom Colors


SL-A				
Series		Mounting		Color
		UM Universal Mount		RA Raw Aluminum
		UB U-Bolt		SM Silver Metallic
		WA Wrap Around		BZ Bronze
				CC Custom Color

Fixtures


2 2 Fixtures
3 3 Fixtures
4 4 Fixtures
5 5 Fixtures
6 6 Fixtures

Spacing "A"


18 18"
24 24"
30 30"
36 36"




SL-A-2




SL-A-3

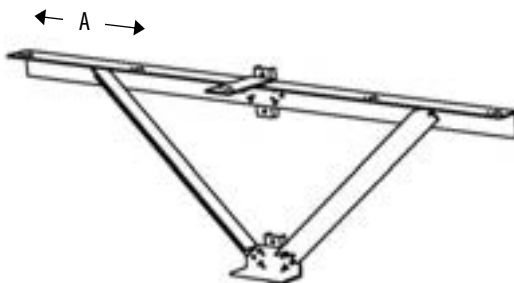


SL-A-5



SL-A-4

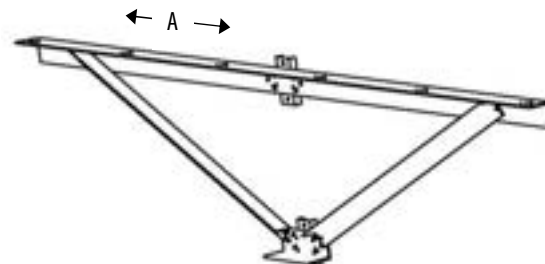

SL-A-6



WA Wrap Around



UB U-Bolt

NOTES

- 1) 6" x 6" x 3/8" Aluminum Angle
- 2) 3.5" x 2.25" x .25" Aluminum Channel (UM)
- 3) Continuous Welded Construction
- 4) Aluminum Angle Bolted Support on Longer Units



PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE Aluminum Sports Lighter Brackets		
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1


SL-A-T Series

Aluminum Sports Lighter Brackets with Tenon


Ordering/Specifying Information

- Aluminum Angle Welded Construction
- Allows for Multiple Fixture Mounting
- Choice of Mounting Options
- Choice of Spacing
- Raw Aluminum or Powder Coat Finish
- Optional Custom Colors


SL-A-T				
Series		Mounting		Color
		UM Universal Mount		RA Raw Aluminum
		UB U-Bolt		SM Silver Metallic
		WA Wrap Around		BZ Bronze
				CC Custom Color
	Fixtures		Spacing "A"	
	2 2 Fixtures		18 18"	
	3 3 Fixtures		24 24"	
	4 4 Fixtures		30 30"	
	5 5 Fixtures		36 36"	
	6 6 Fixtures			




SL-A-T-2




SL-A-T-3

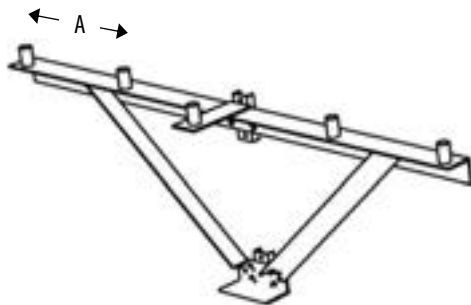


SL-A-T-5

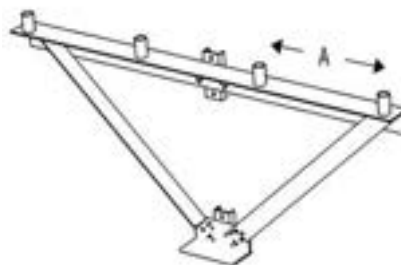

SL-A-T-4

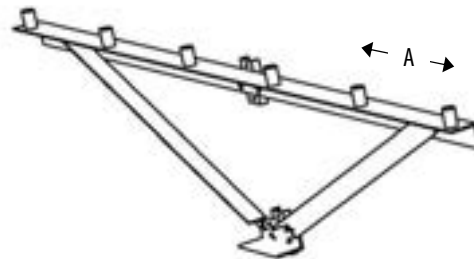

SL-A-T-6



WA Wrap Around



UB U-Bolt

NOTES

- 1) 6" x 6" x 3/8" Aluminum Angle
- 2) 3.5" x 2.25" x .25" Aluminum Channel (UM)
- 3) Continuous Welded Construction
- 4) Aluminum Angle Bolted Support on Longer Units
- 5) Circumferentially Welded 2.38" OD x 4" Tenons



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		Aluminum Sports Lighter Brackets with Tenon		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 1

Ordering/Specifying Information

- 2" (2.38" OD) Aluminum Pipe
- Multiple Mounting Options
- Varying Lengths
- Raw Aluminum or Powder Coat Finish
- Mounting Hardware Sold Separately
- Tenon Mount slips over 2.38" OD Tenon
- Optional Tenon Mount Sizes


Series
CA
CAS

Mount
T Tenon
T2 2@180
T3 3@120
T4 4@90
U Universal
F Flat Surface
W Wall Plate

Length
2 2 Feet
3 3 Feet
4 4 Feet
5 5 Feet
6 6 Feet
8 8 Feet

Color
RA Raw Aluminum
SM Silver Metallic
BZ Bronze
CC Custom Color

Options
T3 3" Tenon
T3.5 3.5" Tenon
T4 4" Tenon
T4.5 4.5" Tenon
TS Top Slot
BS Bottom Slot
TK Top Keyhole Slot
BK Bottom Keyhole Slot
CD Custom Drill

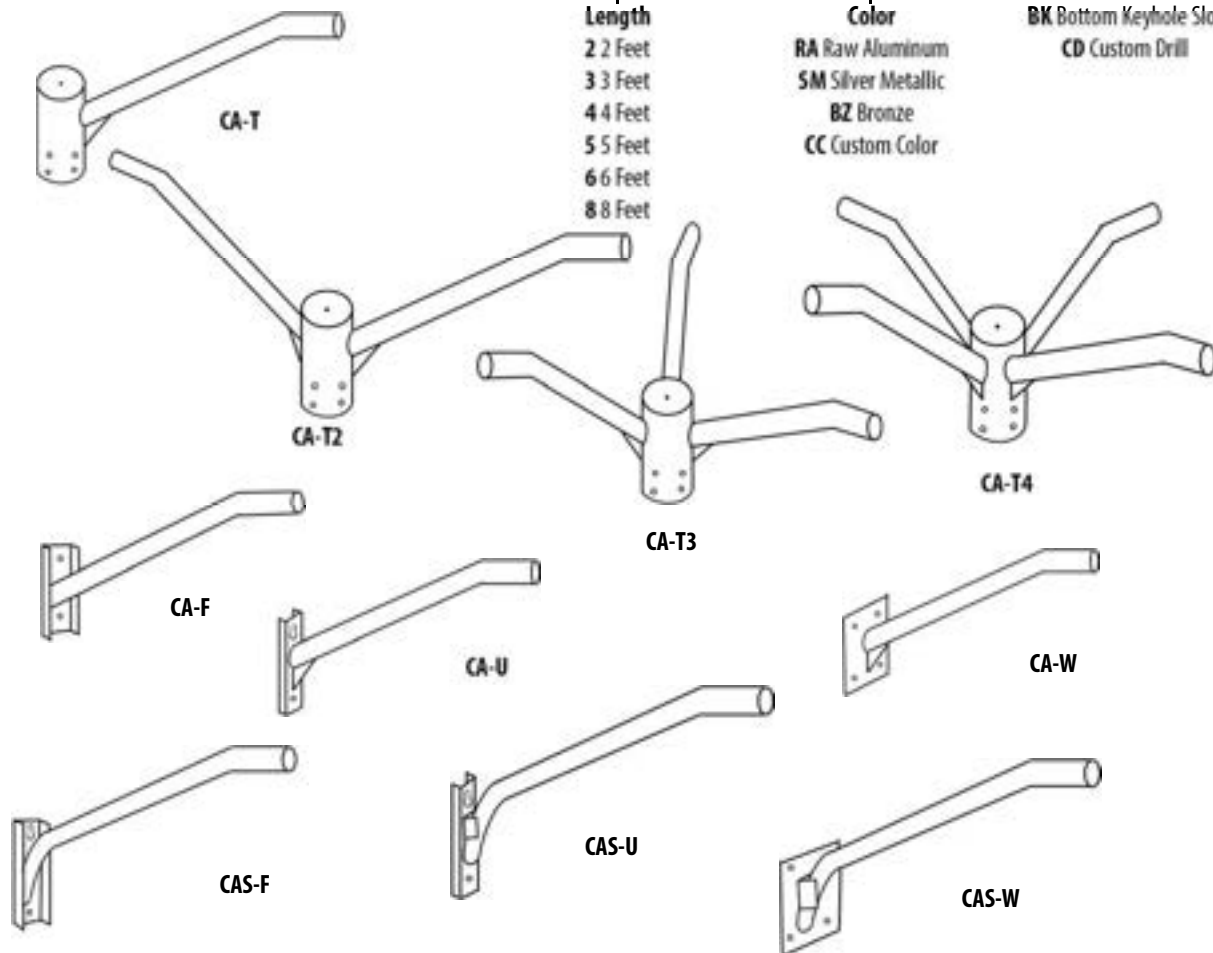

NOTES

- 1) Welded Aluminum Construction
- 2) Pipe is Circumferentially Welded to Supports
- 3) Angular Supports on Brackets over 36"
- 4) Custom Drills, Slot and Keyholes for F & U Mounts
- 5) U Bracket mounts to Wood, Concrete, & Metal Poles
- 6) U Bracket mounts to Flat or Round Surfaces



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE 2" Cobra Arm Series		
NOTES		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
APPROVAL		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1


CMA Series

2" Aluminum Cobra Mast Arm Series

Ordering/Specifying Information

- 2" (2.38" OD) Aluminum Pipe
- Multiple Mounting Options
- Varying Lengths
- Raw Aluminum or Powder Coat Finish
- Mounting Hardware Sold Separately

CMA					
Series		Rise ___ Inches		Color	Options
				RA Raw Aluminum SM Silver Metallic BZ Bronze GY Gray CC Custom Color	CD Custom Drill CK Custom Keyhole CS Custom Slot
	Length 6 6 Feet 8 8 Feet 10 10 Feet 12 12 Feet 14 14 Feet 15 15 Feet		Mount U Universal WA Wrap Around Pole F Flat Surface CM Custom Mount		

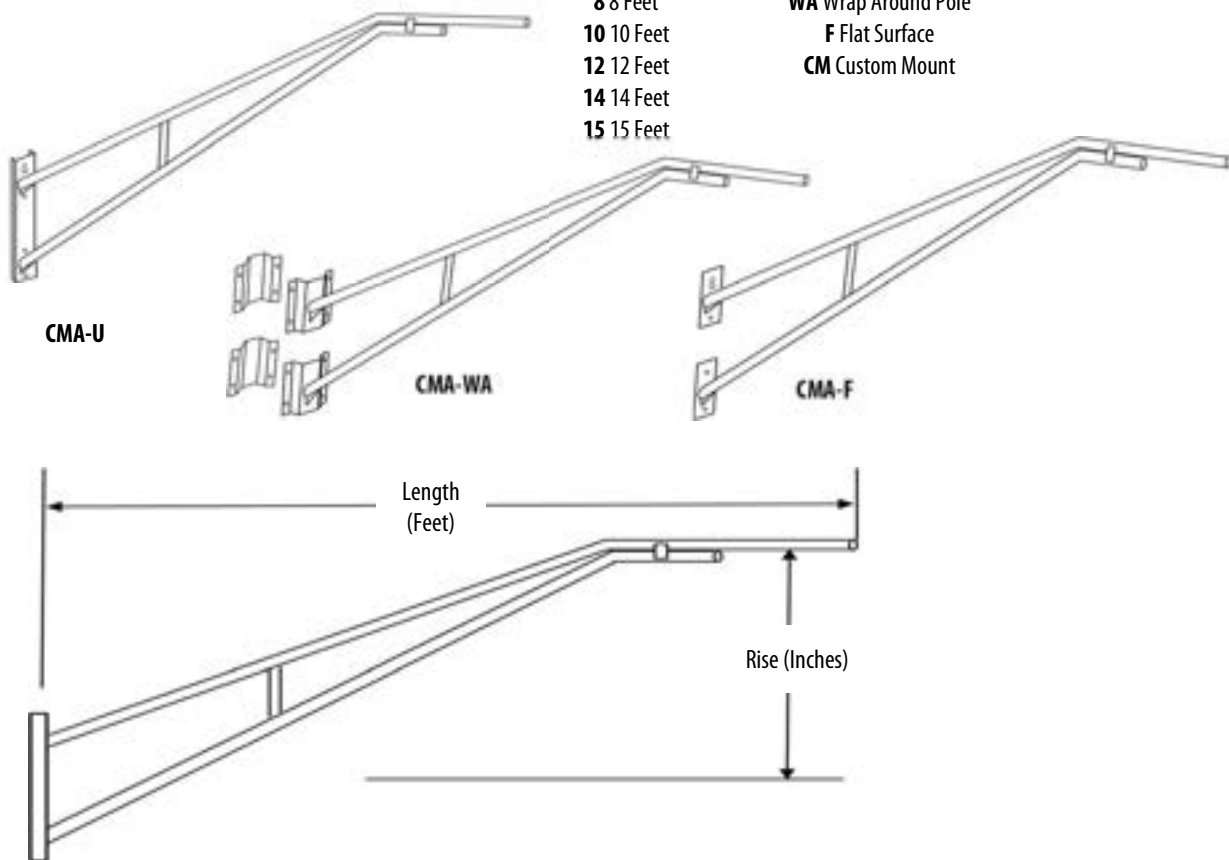

NOTES





- 1) Welded Aluminum Construction
- 2) Pipe is Circumferentially Welded to Supports
- 3) Angular Supports Circumferentially Welded
- 4) Custom Drills, Slot and Keyholes; Consult Factory
- 5) U Bracket mounts to Wood, Concrete & Metal Poles
- 6) U Bracket mounts to Flat or Round Surfaces



PROJECT		SOUTHEAST POLES		
TYPE	QTY			
NOTES		TITLE 2" Aluminum Cobra Mast Arm Series		
APPROVAL		DRAWING/FILE SE Pole and Bracket Catalog.xlsx		
		DATE 4/26/2018	SCALE N.T.S.	SHEET 1 OF 1

Ordering/Specifying Information

- Slips Over Existing Tenon
- Allows for Multiple Fixture Mounting
- Choice of Existing Tenons
- Choice of Spacing
- Bronze Powder Coat Finish
- Optional Colors

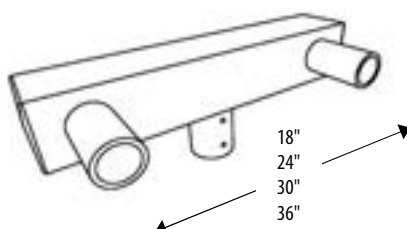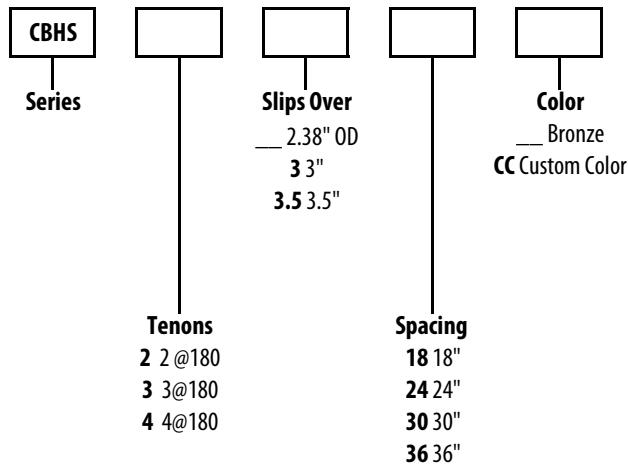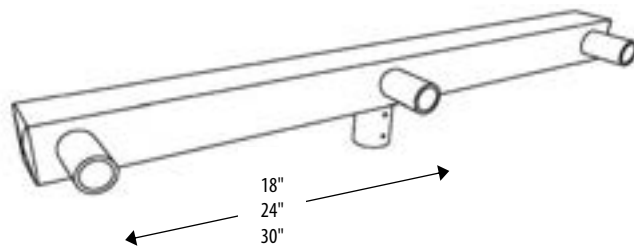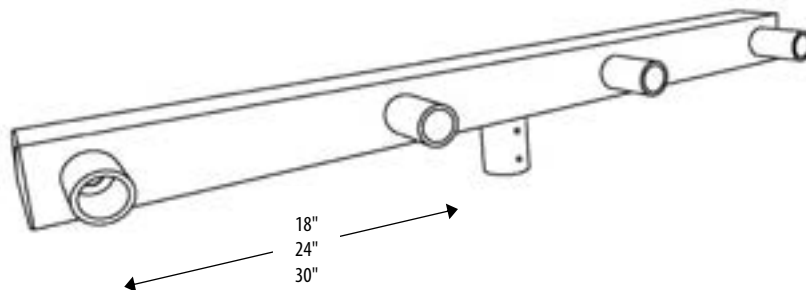
CBHS-2

CBHS-3

CBHS-4
NOTES

- 1) Extruded Aluminum Tubing
- 2) Circumferently Welded 2.38" OD Tenons
- 3) Removable Plastic End Caps for Wiring Access
- 4) Qty 4 - 3/8" Allen Head Stainless Set Screws for Securing



PROJECT		SOUTHEAST POLES		
TYPE	QTY	TITLE		
NOTES		Aluminum Square Charging Bullhorns		
APPROVAL		DRAWING/FILE		
		SE Pole and Bracket Catalog.xlsx		
		DATE	SCALE	SHEET
		4/26/2018	N.T.S.	1 OF 1

CONTEMPORARY POST TOP FIXTURES



AL25



AL26

TRADITIONAL POST TOP FIXTURES



AL10



AL27

ROUND GLOBE FIXTURES



LG



SG



MG

VICTORIAN GLOBE FIXTURES



LV



SV



MV

LINDY GLOBE FIXTURES



ML



LL



SA



MA

RENAISSANCE GLOBE FIXTURES



MR



LR

DECORATIVELY ACCENTED LINDY AND VICTORIAN FIXTURES



MVC



MVCA



MLC



MLCA



LLC



LLCA

DECORATIVE COMMERCIAL POST TOP FIXTURES



ECP

YCP

MCP

NCP

OCP

BCP

HCP

LCP

TRADITIONAL HID POLE FIXTURES



FLL

FLH

ALL

FLXL

ALXL

LED POLE FIXTURES



SMA

SLA

LFA

AAL

PAM/PAL

ARM

ARS

ARL

HID/LED FLOOD FIXTURES



FLS

FLM

FLR

LED FLOOD FIXTURES



SSF

SMF

SLF

LGF

TSF/TLF

120V PAR LANDSCAPE BULLETS



PF20

PF30

PF38

120-277V LED LANDSCAPE BULLETS



SSB

SMB

SLB

HID PALM LIGHTER



PL-SF

120V PAR WELL LIGHTS AND PAGODAS



WL



WLG



PD



PDH



PT



PTH



NHMP

12V LANDSCAPE FIXTURES



NWL



NLB



SS15



SSPL

BRASS

ACCESSORIES - POSTS, TRANSFORMERS AND CABLE



NLS



NLP



NLT



NLC

HID/LED LIGHTING BOLLARDS (42")



BBR



BBS



BG



BL



BR



BLS



BFG



BVR



BVS



BFL



BFR



BSG



BSL



BSR

HID OR LED WALL PACKS



WPP



WPG



WPSP



WPSG



WPM



WPL



WAM/WAL



WSM/WSL



WSS



WFS



WFM



WFL



WFP



WSRC



CWS/CWL



WPI



WSR

LED WALL LIGHTS



WC



ELE



ELC



ELO



TSW/TLW



OWC



ERO



ERH



ERG



ESO



ESH



ESG



ORO



ORH



ORG



OSO



OSH




OSG


ECONOMY LED WALL PACKS




SPORTS, RECREATIONAL AND TENNIS LIGHTING

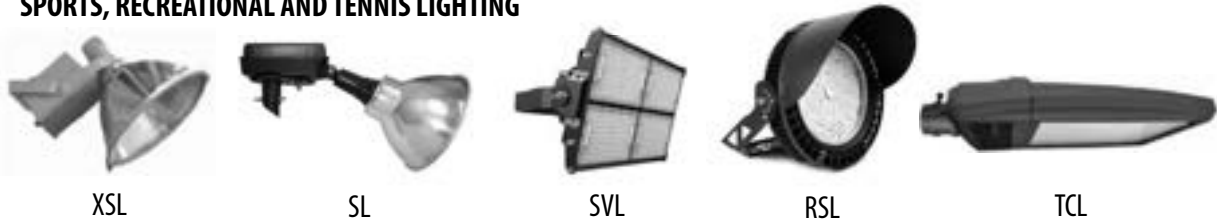


COBRA HEAD, SIGN LIGHTER AND DUSK TO DAWN

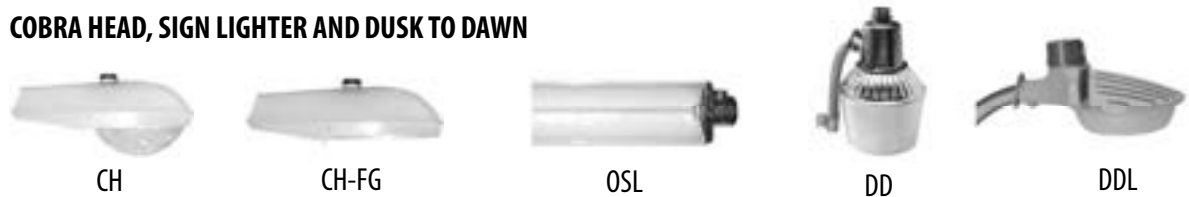

PENDANTS AND VAPOR PROOFS

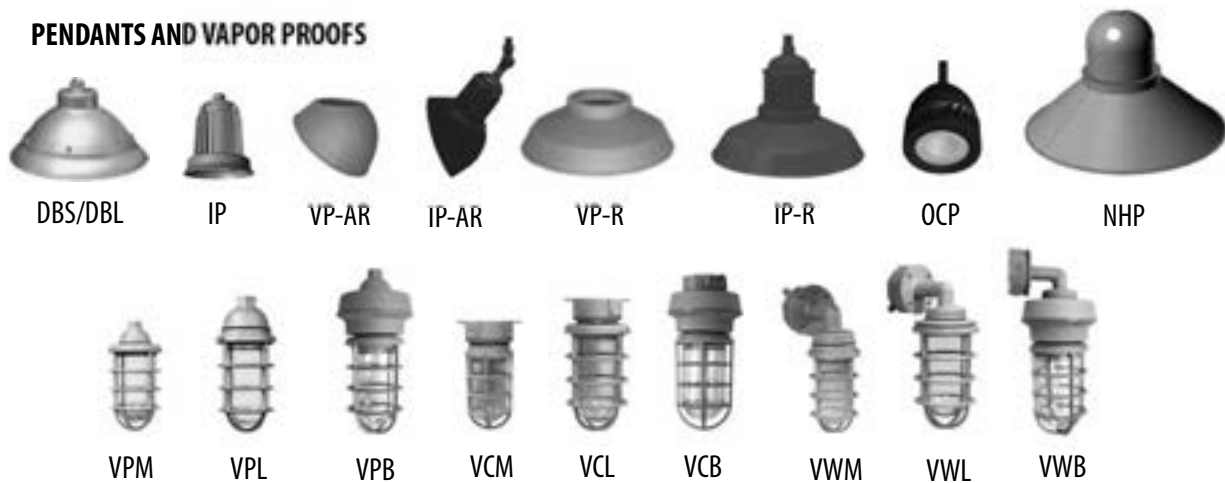

SURFACE AND RECESSED CANOPY/GARAGE- LINEAR VAPOR PROOF

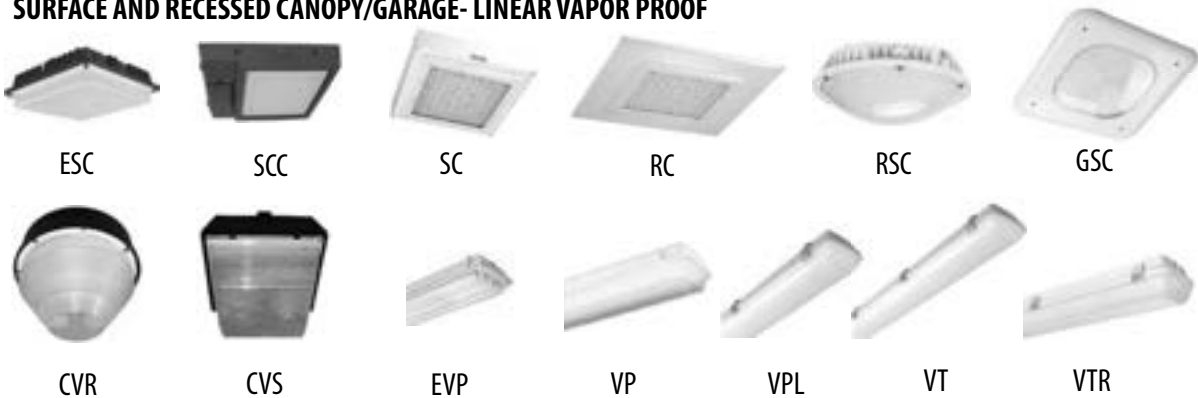

RECESSED CEILING



RCR

RCN

RCC

DKR

DKS

DKC



LI



LP



VT

SURFACE MOUNT



CH



CHL



WA



IN



UC

WAREHOUSE BAY



FHB



LHB



SHB



EHB



RHB

EXITS AND EMERGENCIES



EXITM



EMM



EXCOM



EM15



EML



EL



REL



EXITM-WP



EMM-WP



EXCOM-WP

CORN COBS, HALF CORNS, RETROFITS, LAMPS, BALLASTS AND DRIVERS



CC



HC



SBR



HBR



TRADITIONAL LAMPS
AND BALLASTS



LED LAMPS AND
DRIVERS

SOUTHEAST POLES



America Light, Inc
1489 W 13th St
Riviera Beach FL 33404

Phone 561.296.0364
Sales@AmericaLight.com